

## Sewing Pattern — Skirt 4186

Recommendations on fabric: well-draping fabric of natural or mixed fibers, suitable for skirt

You will also need: fusible interfacing; zipper


If the pattern has a double line around it, the seam allowances are included.

**Note:** By default, seam allowances are NOT included (single line) and will need to be added when laying out and cutting details.

Seam allowance: all seams – 1 cm, on hem – 1.5 cm

Attention! First of all, please print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm) to see how much fabric you will need. Don't forget to take into account pieces to be duplicated or cut on a fold.

When sewing the garment, pay attention to notches, they must match up with corresponding pieces.

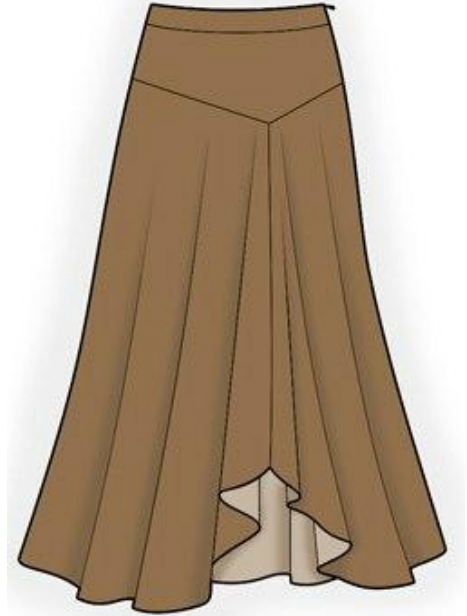

### **CUTTING:**

The word, “beam” used on some patterns means “straight of grain”. Some pieces will be cut on the fold, this is noted on the pattern piece. Mark all notches and other design features such as darts, pleats etc. from the pattern onto your fabric.

Darts: The fold of the dart is always pressed toward the center of your garment, or down toward the hem.

### Fabric:

1. Back waistband – cut 2 (one is facing)
2. Back yoke – cut 1
3. Back skirt – cut 1
4. Front waistband – cut 2 (one is facing)
5. Front yoke – cut 1
6. Right front skirt – cut 1
7. Left front skirt – cut 1

Fusible interfacing: front waistband, back waistband

### **INSTRUCTIONS:**

1. Apply interfacing to front waistband and back waistband.
2. Sew back waistband to back yoke. Press seam allowances toward waistband.
3. Sew back yoke to back skirt. Serge and press seam toward yolk.
4. Sew front waistband to yoke. Press seam allowances toward waistband.

5. Sew skirt to front yoke. Sew right front skirt to front yoke. Clip seam allowances near marker, serge and press seam toward yoke. Sew left front skirt to front yoke. Clip seam allowances near markers, serge and press seam toward yoke. Sew free section (center front seam) of left and right front skirts. Press seam allowances apart and serge.
6. Sew right side seam of skirt. Press seam allowances apart and serge. Topstitch at 0.5 cm from the connection seam of skirt and yoke. Sew left side seam from zipper marker downward. Press seam allowances apart, as well as the opening for zipper. Serge edges. Sew in zipper.
7. Sew and press apart right side seams of waistband facings. Serge lower edge of the facings.
8. Pin facings to waistband, right sides together, and sew upper edge. Turn facings onto wrong side, and press. Turn inside seam allowance under and baste into connecting seam. Slipstitch ends to zipper tape. Topstitch at 0.5 cm from edge on right side of waistband.
9. Serge lower edge of skirt, press onto wrong side and topstitch.

### **TECHNICAL DRAWING:**

