

## Sewing Pattern — T-shirt 7163

Recommendations on fabric: knit fabric.

You will also need: trimming of 1 cm wide.


Seam allowances: on hem and hem of sleeves – 2.0 cm,  
other seams – 0.8 cm.

### **Note on seam allowances:**

- If the pattern has double contour the seam allowances are included. They are 1 cm unless specified otherwise.
- If the pattern has single contour, the seam allowances are NOT included and need to be added when laying out the pattern.

### **Note on length of fabric:**

*Attention! The amount of fabric needed for your pattern is not included. It will depend on the selected pattern size, the width, and design of the fabric you plan to use. First, print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm). Measure how much fabric you will need. Don't forget to account for pieces that need to be cut multiple times and pieces that are cut on the fold.*

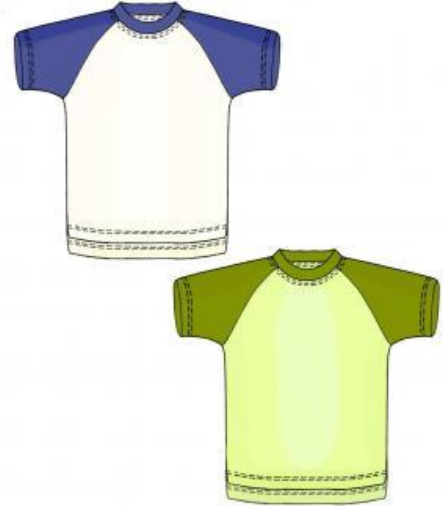

### **CUTTING:**

#### **Main fabric:**

1. Front – cut 1
2. Back – cut 1
3. Sleeve – cut 2
4. Collar – cut 1

**Advice:** Knit fabric pieces are sewn together with special elastic or narrow zig-zag stitch. Seam allowance on hem is stitched with twin needles to save stretchiness. Pieces can also be sewn together with 3 or 4 – thread serger. When serging, cut seam allowances to 0.6 – 0.8 cm.

**Note:** before sewing please check your head gets through the collar sewn into a ring.

### **INSTRUCTIONS:**

1. Sew sleeves to front and back. Sew side and sleeve edges, leaving slit sections unsewn.
2. Sew collar into ring. Fold in half. Sew collar into neck, stretching edge of collar and placing collar seam at the left neck point. Stitch collar connecting seam with stretchy stitch.
3. Finish slits with trimming.
4. Serge hem of the t-shirt and hem of sleeves, press to wrong side and topstitch.
5. Press ready t-shirt.

### **TECHNICAL DRAWING:**

