Sewing Pattern — Blouse 4146

Recommendations on fabric: medium stretch-knit fabric of natural or mixed fibers

If the pattern has a double line around it, the seam allowances are included.
Note: By default, seam allowances are NOT included (single line) and will need to be added when laying out and cutting details.

Seam allowance: 0.7 cm on all edges. Seam allowance along the bottom of the sleeve, bottom edge of the garment, neckline — 1.5 cm

Attention! First of all, please print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm) to see how much fabric you will need. Don't forget to take into account pieces to be duplicated or cut on a fold.

When sewing the garment, pay attention to notches, they must match up with corresponding pieces.

CUTTING:
The word, “beam” used on some patterns means “straight of grain”. Some pieces will be cut on the fold, this is noted on the pattern piece. Mark all notches and other design features such as darts, pleats etc. from the pattern onto your fabric.

Advice:
Knit fabric pieces are sewn together with special stretch-stitch or narrow zig-zag stitch. Seam allowance on hem is stitched with twin needles to save stretchiness. Pieces can also be sewn together with 3 or 4 – thread serger. When serging, cut seam allowances to 0.6 – 0.8 cm.

Fabric:
1. Back — cut 1 on fold
2. Front — cut 1

INSTRUCTIONS:

1. Make a gathering stitch along the slit and gather fullness. Sew the slit and serge.
2. Sew the shoulder and side seams. Serge and press the seam toward back.
3. Serge seam allowance along the neckline, press inside and topstitch.
4. Cut a square 6x6 cm. Fold seam allowances on the opposing sides under, and stitch at 0.5 cm from the edge. Pin the piece onto the front and stitch following the marker.
Fold over onto wrong side, turn seam allowance under, and hand-stitch into connecting seam.
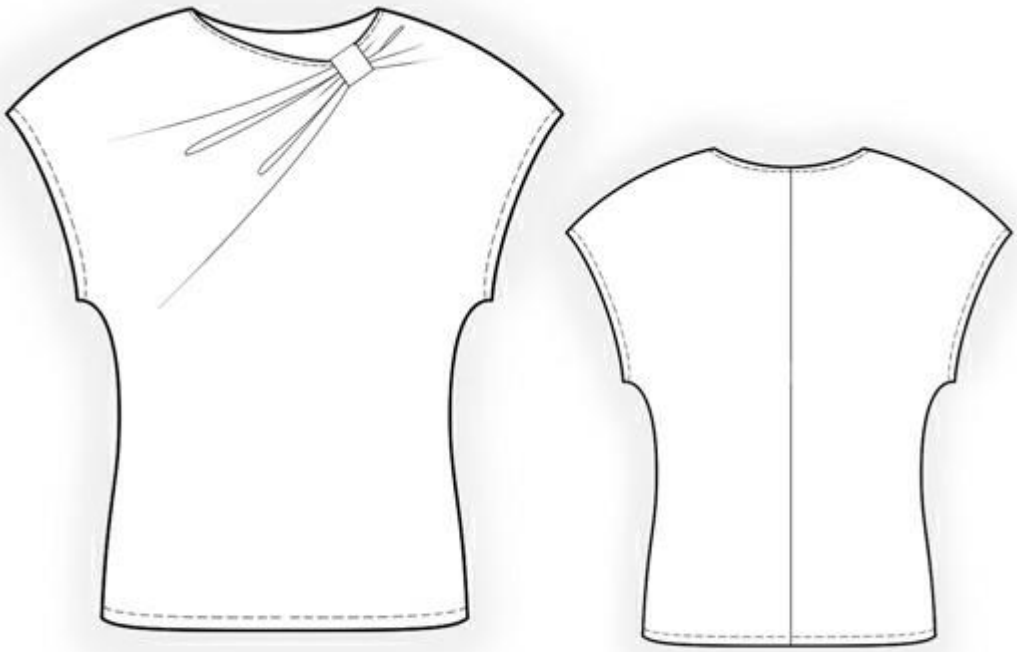
TECHNICAL DRAWING: