

Sewing Pattern — Dress 4138

Recommendations on fabric: fabric suitable for dresses.

You will also need: 1 invisible zipper.


Seam allowances are included if the pattern has double contour.

Seam allowances are NOT included if your pattern has single contour and need to be added when laying out and cutting details. All seams 1 cm. Hem of the garment 2 cm.

Attention! First of all please print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm) to see how much fabric you will need. Don't forget to count pair parts and symmetrical parts.

When sewing the garment, pay attention to notches, they must coincide.

Attention! Notes are made on right side of patterns.

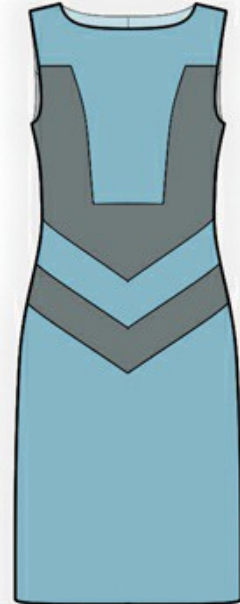

CUTTING:

Main fabric 1:

1. Upper front part – 1 detail
2. Central back part – 2 details
3. Lower back part – 2 details
4. Lower front part – 1 detail
5. Middle part of front part – 1 detail
6. Facing of front part – 1 detail
7. Facing of back part – 2 details

Main fabric 2:

1. Top inset of front part - 1 detail
2. Top inset of back part – 2 details
3. Lower inset of back part – 2 details
4. Lower inset of front part – 1 detail

INSTRUCTIONS:

1. Sew top front part and top inset, slashing seam allowance of inset in corners. Serge and press: in top corner – to top front part, and in lower corner - downwards. Stitch to top middle part and lower inset of front part. Serge and press downwards. Stitch lower front part. Serge and press downwards.
2. Sew in inset of back part into central back part, slashing in corners. Serge and press to central part. Stitch lower inset to central back part. Serge and press downwards. Stitch lower back part to top part. Serge and press downwards.

3. Serge middle edge of back part. Sew middle edge of back part on lower parts. Press apart the seam. Sew in zipper into middle edge of back part.
4. Sew shoulder and side edges. Serge and press towards back part.
5. Sew shoulder and side edges of the facings. Press apart the seam. Serge lower seam allowance of facings. Overstitch the neckline with facing, slash seam allowances. Turn the facing onto wrong side and press. Overstitch armhole in two steps: first armhole of front part, then armhole of back part. Slash seam allowances, turn the facing onto wrong side, press and tack it to side and shoulder edges. Turn inside middle edges of back part and tack to zipper.
6. Serge hem of garment. Turn onto wrong side, press and topstitch.

TECHNICAL DRAWING:

