

Recommendations on fabric: cotton, wool, heavy-weight silk or whipcord.

You will also need: fusible interfacing, lining, elastic.

Seam allowances: all seams – 1.0 cm.

Note on seam allowances:

- If the pattern has double contour the seam allowances are included. They are 1 cm unless specified otherwise.
- If the pattern has single contour, the seam allowances are NOT included and need to be added when laying out the pattern.

Note on length of fabric:

Attention! The amount of fabric needed for your pattern is not included. It will depend on the selected pattern size, the width, and design of the fabric you plan to use. First, print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm). Measure how much fabric you will need. Don't forget to account for pieces that need to be cut multiple times and pieces that are cut on the fold.



CUTTING:

Main fabric:


1. Peak – cut 2 (A)
2. Side – cut 2 (B)
3. Bottom – cut 2 (C)

Lining:

1. Side – cut 2 (B)
2. Bottom – cut 2 (C)

Fusible interfacing:

1. Peak – cut 2 (A)

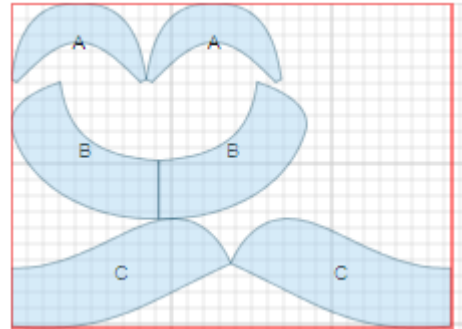

INSTRUCTIONS:

1. Place bottom pieces right sides together. Sew center seam, press open and make stitches along the seam.
2. Sew side pieces right sides together, press seam open and make stitches along the seam.
3. Place bottom and side pieces right sides together. Sew, press seams open, and make stitches along seams.
4. Apply fusible interfacing to peak pieces. Place pieces right sides together and sew outer edge. Snip seam. Turn peak piece right side out, baste out and press. Topstitch along outer edge.
5. Place pek and cap right sides together matching center notches, and sew.
6. Turn lower edge of cap under and press. Attach elastic on back of the head between bottom and side pieces connecting seams. Attach ends of elastic to seams.
7. Sew lining pieces together. Set lining into the cap matching seams. Turn lower edge of lining under and topstitch connecting cap and lining pieces. Make another decorative stitch over the elastic on back of head.

TECHNICAL DRAWING:

