

Sewing Pattern — Cap 7091

Recommendations on fabric: thick cotton or flax.

You will also need: lining, fusing, snaps

If the pattern has double contour the seam allowances are included.

If the pattern has single contour, the seam allowances are NOT included and need to be added when laying out and cutting details.

Seam allowances: all seams – 1 cm

Attention! First of all please print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm) to see how much fabric you will need. Don't forget to count pair parts and symmetrical parts.

When sewing the garment, pay attention to notches, they must coincide.

CUTTING:

Main fabric:


1. Center part - 2 details
2. Side part - 2 details
3. Visor - 2 details
4. Cap-band – 2 details

Lining:

1. Center part - 2 details
2. Side part - 2 details

Fusing:

1. Visor - 1 detail
2. Cap-band – 1 detail

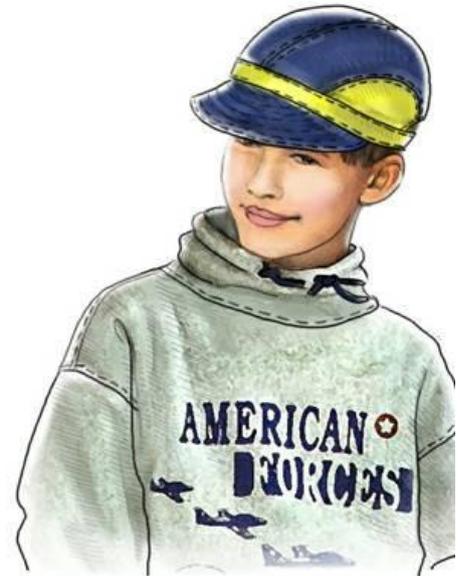

INSTRUCTIONS:

1. Apply fusing to details of visor and cap-band.
2. Fold center parts right sides together, sew, top-stitch the seam. Stitch side parts to center parts, top-stitch the seams.
3. Fold visor details right sides together and overstretch along outer contour. Cut seam allowance close to the seam. Turn visor onto right side, serge the seam, press. Topstitch the visor with parallel stitches at 0.5 cm from each other. Level inner edge of the visor.
4. Fold cap-band details right sides together, inserting the visor according to markers. Overstretch cap-band along ends and lower edge, catching the visor. Press top edges of cap-band inside.
5. Sew details of lining the same way as main fabric details. Fold main fabric and lining details right sides together and sew them together along edge line. Turn the head onto right side, serge the seam, press and put decorative stitch at 0.2 cm off the edge.
6. Insert head into cap-band and put decorative stitch around cap-band, catching the head.
7. Specify the size, punch the snaps on ends of cap-band.

TECHNICAL DRAWING: