

Sewing Pattern — Top 4134


Recommendations on fabric: natural or mixed, medium to high stretch-knit fabric

Note: By default, seam allowances are NOT included (single line) and will need to be added when laying out and cutting details.

Seam Allowance: on edge of the armhole - 1.5 cm, on garment hem – 1.5 cm, on outer edge of the ruche – 0 cm, on edge of the flounce – 0 cm, all other seams - 0.7 cm

Attention! First of all, please print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm) to see how much fabric you will need. Don't forget to take into account pieces to be duplicated or cut on a fold.

When sewing the garment, pay attention to notches, they must match up with corresponding pieces.

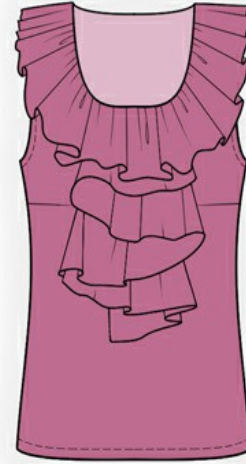

CUTTING:

The word, “beam” used on some patterns means “straight of grain”. Some pieces will be cut on the fold, this is noted on the pattern piece. Mark all notches and other design features such as darts, pleats etc. from the pattern onto your fabric.

Darts: The fold of the dart is always pressed toward the center of your garment, or down toward the hem.

Advice:

Knit fabric pieces are sewn together with special stretch-stitch or narrow zig-zag stitch. Seam allowance on hem is stitched with twin needles to save stretchiness. Pieces can also be sewn together with 3 or 4 – thread serger. When serging, cut seam allowances to 0.6 – 0.8 cm.

Main fabric:

1. Front – cut 1
2. Back – cut 1
3. Neck Ruffle – cut 1
4. Flounce – cut 1

INSTRUCTIONS:

1. Mark and sew darts on front.
2. Serge outer edge of the flounce with rolled seam. Make a gathering stitch on inner edge of the flounce and gather fullness. Pin flounce onto front and topstitch on top edge and down the marked line (approximate sewing scheme is given on front pattern).
3. Sew shoulder and side seams. Serge seams and press toward back.
4. Sew together short-side edges of ruffle. Serge outer edge with a rolled hem. Make a gathering stitch along inner edge and gather fullness. Pin ruffle, right side onto wrong side of the neckline, adjust gathers evenly, and sew. Serge seam allowance. Turn the ruffle onto right side.
5. Serge armhole. Turn seam allowance inside and topstitch.
6. Serge bottom edge of garment. Turn under, press, and topstitch.

TECHNICAL DRAWING:

