

Sewing Pattern — Skirt 4376

Recommendations on fabric: natural or mixed suiting fabric

You will also need: fusible interfacing, invisible zipper


If the pattern has a double line around it, the seam allowances are included.

Note: By default, seam allowances are NOT included (single line) and will need to be added when laying out and cutting details.

Seam allowance: 1 cm for all seams; 3 cm for hem

Attention! First of all, please print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm) to see how much fabric you will need. Don't forget to take into account pieces to be duplicated or cut on a fold.

When sewing the garment, pay attention to notches. They must match up with corresponding pieces.

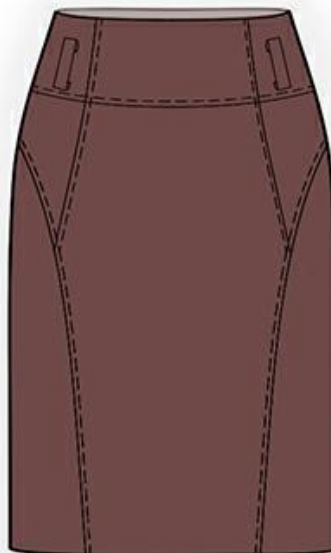

CUTTING:

The word, “beam” used on some patterns means “straight of grain”. Some pieces will be cut on the fold, this is noted on the pattern piece. Mark all notches and other design features such as darts, pleats etc. from the pattern onto your fabric.

Darts: The fold of the dart is always pressed toward the center of your garment, or down toward the hem.

Fabric:

1. Back yoke – cut 4
2. Back –cut 2
3. Center front yoke - cut 1
4. Side front yoke - cut 2
5. Front – cut 1
6. Side - cut 2
7. Side front –cut 2
8. Inner front yoke - cut 1

Fusible interfacing:

1. Back yoke –cut 2
2. Inner front yoke - cut 1

INSTRUCTIONS:

1. Apply interfacing to listed pieces.
2. Sew darts on back panels of the skirt. Press darts toward center. Sew outer back yokes to backs, press seam allowances upwards.
3. Serge center back edges separately on each section, serging the vent at the same time. Sew center back seam from zipper notch down to vent's edge. Press seam allowances apart, pressing the opening for zipper. Press seam allowances of the vent to left side. Press right side of the vent under at 1 cm. Fasten seam allowances of the vent with machine stitch. Sew in zipper.
4. Sew front side yoke to side, press seam allowances upwards and make a decorative stitch at 0.7 cm along the seam. Sew center front yoke to front, press seam allowances upwards and make a decorative stitch at 0.7 cm from the seam.
5. Stitch side to front, press seam allowances toward center and make a decorative stitch at 0.7 cm from the seam. Sew side fronts to front panel, press seam allowances to side and make a decorative stitch at 0.7 cm from the seam.
6. Sew side seams, serge and press seam toward back.
7. Sew side seams of inner yokes. Serge lower edge. Place yoke and skirt right sides together and sew on upper edge. Clip into curves and understitch. Turn facings onto wrong side, press. Turn side edges of inner yoke under, and sew to zipper tape. Topstitch inner yoke into outer yoke connecting seam.
8. Serge lower edge of the garment, press onto wrong side, and top-stitch.
9. Serge belt loop on one long side. Turn unserged edge under, and close with serged edge. Make a decorative stitch at 0.1 cm from the edge. Cut strip into belt loops. Stitch belt loops to skirt.

TECHNICAL DRAWING:

