

Sewing Pattern — Skirt 4387

Recommendations on fabric: natural or mixed suiting fabric;
decoration fabric of similar fabric.

You will also need: invisible zipper, fusible interfacing; a
button.

If the pattern has a double line around it, the seam
allowances are included.

Note: By default, seam allowances are NOT included (single
line) and will need to be added when laying out and cutting
details.

Seam allowance: all seams – 1 cm; hem of skirt – 3 cm.

Attention! First of all, please print all the paper patterns and
lay them out at the width of fabric you plan to use (usually
from 90 to 150 cm) to see how much fabric you will need.
Don't forget to take into account pieces to be duplicated or cut
on a fold.

When sewing the garment, pay attention to notches. They
must match up with corresponding pieces.

CUTTING:

The word, “beam” used on some patterns means “straight of grain”. Some pieces will be cut on the
fold, this is noted on the pattern piece. Mark all notches and other design features such as darts,
pleats etc. from the pattern onto your fabric.

Fabric:


1. Back facing – cut 4
2. Back panel – cut 2
3. Front facing – cut 2
4. Upper part of front panel – cut 1
5. Middle part of front panel – cut 1
6. Lower part of front panel – cut 1
7. Belt loop – cut 1

Decoration fabric:

1. Shaped belt – cut 2

Fusible interfacing:

1. Back facing – cut 2
2. Front facing – cut 1

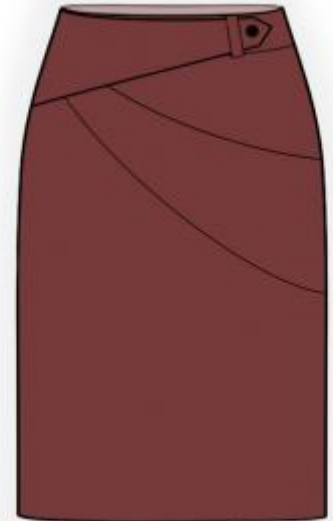

INSTRUCTIONS:

1. Apply interfacing to listed pieces.
2. Sew darts on back panels of the skirt. Press darts toward center. Sew outer back facings to backs, press seam allowances upwards.
3. Serge center back edges separately on each section, serging the vent at the same time. Sew center back seam from zipper notch down to vent's edge. Press seam allowances apart, pressing the opening for zipper. Press seam allowances of the vent to left side. Press right side of the vent under at 1 cm. Fasten seam allowances of the vent with machine stitch. Sew in zipper.
4. Serge one long edge of belt loop. Turn inside unserged edge and press. Close unserged edge with serged one and make two parallel stitches, fastening allowance.
5. Sew upper front part to middle part, press seam allowances upwards and serge. Sew middle front part to lower part, press seam allowances upwards and serge. Sew outer front facing to front panel, inserting belt loop, press seam allowances upwards.
6. Place shaped belts right sides together and stitch outer edge. Clip seams on curves, trim in corners; turn right side out, straighten and press.
7. Sew side seams, inserting shaped belt, press seam allowances toward back and serge.
8. Sew side seams of inner facings. Place facing and skirt right sides together and stitch upper edge. Topstitch seam allowances onto inner facing at 0.2 cm from connecting seam. Turn facings to wrong side, press. Turn under middle edges of inner facing and tack to zipper tape. Topstitch inner facing into outer facing connecting seam.
9. Serge lower edge of the garment, press onto wrong side, and slip-stitch.
10. Turn inside unserged edge of belt loop and topstitch onto facing. Sew a button, fastening shaped belt on the skirt.

TECHNICAL DRAWING:

