

Sewing Pattern — Dress 4481

Recommendations on fabric: natural or mixed dress fabric.

You will also need: invisible zipper


If the pattern has a double line around it, the seam allowances are included.

Note: By default, seam allowances are NOT included (single line) and will need to be added when laying out and cutting details.

Seam allowance: hem – 2 cm, hem of sleeves – 1.5 cm, other seams – 1 cm

Attention! First of all, please print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm) to see how much fabric you will need. Don't forget to take into account pieces to be duplicated or cut on a fold.

When sewing the garment, pay attention to notches, they must match up with corresponding pieces.

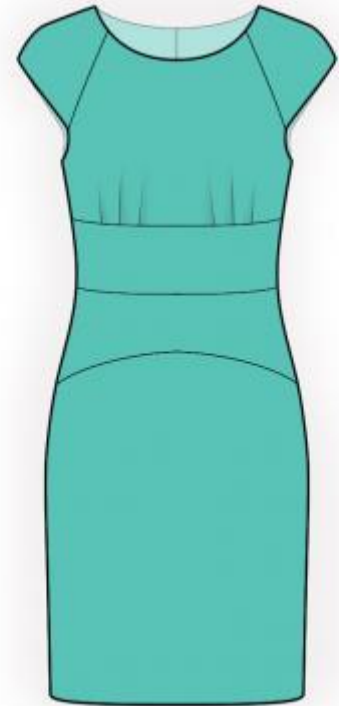

CUTTING:

Main fabric:

1. Upper back - cut 2
2. Back insert — cut 2
3. Back skirt insert — cut 2
4. Lower back – cut 2
5. Upper front – cut 1
6. Front insert – cut 1
7. Front skirt insert – cut 1
8. Lower front – cut 1 on fold
9. Back sleeve – cut 2
10. Front sleeve – cut 2

INSTRUCTIONS:

1. Sew darts on backs. Press darts toward center. Sew back insert. Serge seam and press on insert. Sew back skirt insert. Serge seam and press it on the insert. Sew lower skirt. Serge seam and press it upwards.
2. Serge separately center back edges. Sew from zipper mark to slit mark. Press apart seam. Sew in zipper. Topstitch seams along slit at 0.1 – 0.2 cm from the edge.
3. Make and fasten pleats on central front. Direct folds to side edges. Sew front details the same way as back details.

4. Sew shoulder edges of sleeves. Serge seam and press to back sleeve. Serge lower edge of sleeve, fold inside and topstitch. Sew sleeves to front and back. Serge seam and press on sleeve.
5. Sew side edges. Serge seam allowances and press to back.
6. Cut (or take ready) bias tape of 4 cm wide. Length is equal to lower part of armhole + 4 cm. Fold bias tape in half lengthwise right side out and press. Place bias tape onto armhole edge from the right side and stitch. Trim seam allowances. Fold bias tape to wrong side and topstitch along the fold onto main detail. Press seam.
7. Cut (or take ready) bias tape of 4 cm wide. Length is equal to neckline. Fold bias tape in half lengthwise right side out and press. Place bias tape onto neckline from right side and stitch. Trim seam allowances. Fold bias tape to wrong side and topstitch along the fold onto main detail. Press seam.
8. Serge hem of dress. Fold to wrong side, press and topstitch.

TECHNICAL DRAWING:

