

## PATTERN OVERVIEW

### Made-to-measure pattern:

The pattern is drafted by our proprietary software specifically for your measurements that you supply when making an online order. We strongly recommend that you request a free preview to check the style lines and the amount of fabric needed before ordering the paid version.

### Pattern features:

Pencil skirt with front / back inserts and pipings (if desired), zipper in back seam. The skirt sits at natural waistline, the length is at center of kneecap, ease around waist is approx. 1", ease around hips approx. 1.5" depending on the size.

**Recommendations on fabric:** wool or semi-wool, dress fabric, suiting fabric, bottom weight woven fabric, fabric of contrast colour for inserts (optional).

**You will also need:** fusible interfacing, 1 zipper (the length in cm and inches is mentioned on the pattern piece), piping.

### Seam allowances:

If the pattern has double contour the seam allowances are included and are as follows: 1 inch on all edges. hem of skirt – 1.5 inch.

Attention! Seam allowances are NOT included by default and need to be added when laying out and cutting details if your pattern has single contour.

### Fabric requirements:

To estimate fabric requirements, get a free preview for the pattern in your size at [www.Lekala.net](http://www.Lekala.net) and use [Online Fabric Estimator](#). Alternatively you may print all the paper patterns and lay them out at the width of fabric you plan to use (usually 44 inches to 60 inches) to see how much fabric you will need. Don't forget to count pair parts and symmetrical parts.

When sewing the garment, pay attention to notches, they must match up.



## CUTTING:

Lay pattern pieces out using the straight of grain line. Some pieces may be cut on the fold. This is noted on the pattern piece. Mark all notches and other design features such as darts, pleats etc. from the pattern onto your fabric.


### Main fabric:

1. Upper back insert - cut 2 (A)
2. Upper front insert - cut 2 (B)
3. Back insert - cut 2 (C)
4. Front insert - cut 2 (D)
5. Front side insert - cut 2 (E)
6. Center back - cut 2 (F)
7. Center front - cut 1 (G)
8. Side front - cut 2 (H)
9. Side back - cut 2 (I)
10. Back facing - cut 2 (J)
11. Front facing \_ cut 2 (K)

### Fusible interfacing:

1. Front/back facing

\* The capital letters in brackets correspond to pattern blocks as seen in Online Fabric Estimator.

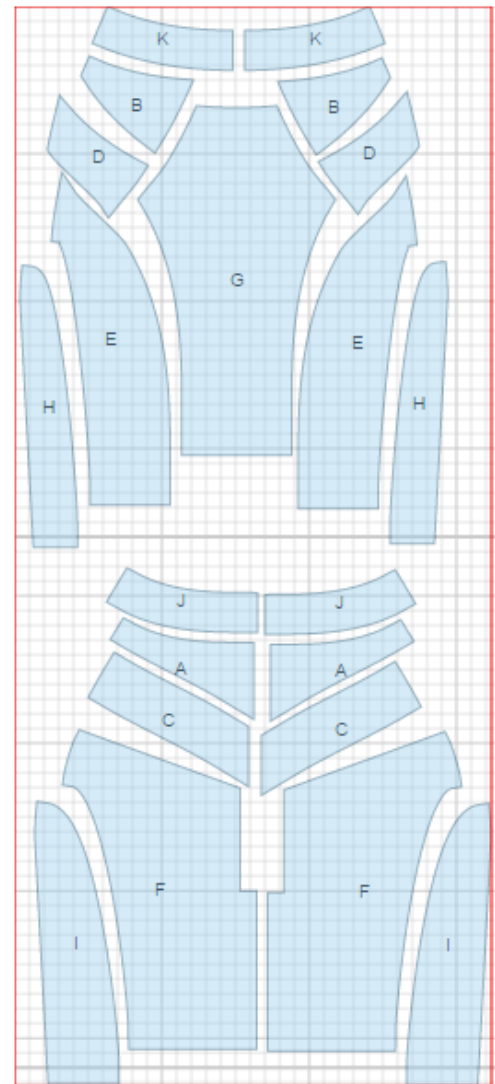

---

**INSTRUCTIONS:**

1. Apply fusible interfacing to facings.
2. Sew side backs to backs\*, serge and press seams towards center. Sew back inserts to backs\*, serge and press seams upwards. Sew upper back inserts to backs\*, serge and press seams upwards. Serge center back edges and vent edges separately. Sew center back seam from top down to vent. Press seam open, including opening for zipper. Press vent seam allowances towards left side seam. Press right side of the vent at 1 cm and topstitch. Fasten vent seam allowances with machine stitch. Install zipper.
3. Sew upper front inserts and front inserts\*. Serge and press seams upwards. Sew front insets to center front\*. Trim seam in corners. Serge and press seams towards center. Sew front side inserts to center front\*, serge and press seams towards center. Sew side fronts to center front\*, serge and press seams towards center.
4. Sew side seams. Serge and press seam towards back.
5. Sew side seams on facings.
6. Serge lower edge of facing.
7. Pin facing, right sides together, to waistline , matching side seams and center front line. The seam allowances of facings should line up with the lapped zipper. Sew, and grade seam allowance.
8. Press along upper edge so that facing is toward inside. Slip stitch facings to seam allowances along side seams.
9. Slip stitch short ends of facings to zipper tape. Sew hook and eye near waist on the inside of skirt.
10. Hem skirt by hand or machine as desired.

*\*Insert piping if desired.*



# S3010

Skirt



---

*If you have any further questions regarding the pattern,  
please don't hesitate to contact us at [info@sewist.com](mailto:info@sewist.com).  
We are always happy to help!*

---