

Recommendations on fabric: natural or mixed light to mid-weight fabric suitable for blouses.

You will also need: lining

Seam allowances: all seams – 1.0 cm.

Note on seam allowances:

- If the pattern has double contour the seam allowances are included. They are 1 cm unless specified otherwise.
- If the pattern has single contour, the seam allowances are NOT included and need to be added when laying out the pattern.

Note on length of fabric:

Attention! The amount of fabric needed for your pattern is not included. It will depend on the selected pattern size, the width, and design of the fabric you plan to use. First, print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm). Measure how much fabric you will need. Don't forget to account for pieces that need to be cut multiple times and pieces that are cut on the fold.




CUTTING:

Main fabric:

1. Back – cut 1 on fold (C)
2. Front - cut 1 (A)

Lining

3. Front lining - cut 1 (B)
4. Back lining - cut 1 on fold (C)

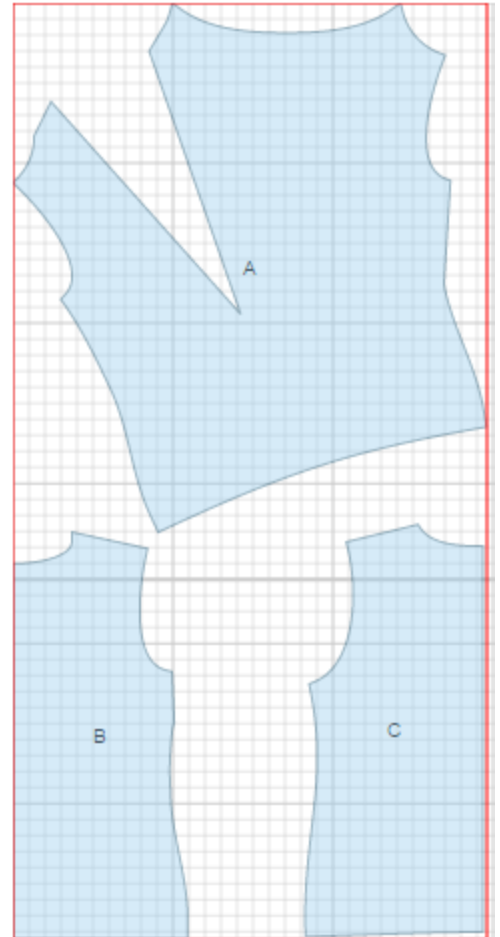

INSTRUCTIONS:

1. Sew darts on lining piece, press downwards.
2. Sew pleat depth on front. Make and fasten pleat according to marking.
3. Cut a bias tape of 4 cm wide. Length is equal to neckline + 5 cm. Fold bias tape in half lengthwise right side out and press. Place bias tape along neckline from right side and sew. Turn bias tape to the inside and topstitch along the fold onto blouse. Press. Finish neckline of front lining the same way.
4. Sew side and shoulder seams. Press seams open. Sew side and shoulder seams of lining leaving an opening in left side seam. Press seams open.
5. Sew back lining to back neckline. Trim seam. Turn lining to wrong side and press. Sew lining to armholes in two steps: first front armhole, then back armhole. Sew lining to lower edge of blouse.
6. Turn blouse out through the opening in left side seam. Sew opening closed.

TECHNICAL DRAWING:

