

Recommendations on fabric: mid-weight low-stretch knit fabric.

Seam allowances: on hem – 2.0 cm, on neckline - 0 cm, other seams – 1.0 cm.

Note on seam allowances:

- If the pattern has double contour the seam allowances are included. They are 1 cm unless specified otherwise.
- If the pattern has single contour, the seam allowances are NOT included and need to be added when laying out the pattern.

Note on length of fabric:


Attention! The amount of fabric needed for your pattern is not included. It will depend on the selected pattern size, the width, and design of the fabric you plan to use. First, print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm). Measure how much fabric you will need. Don't forget to account for pieces that need to be cut multiple times and pieces that are cut on the fold.



CUTTING:

Main fabric:

1. Back – cut 2 (B)
2. Front - cut 1 (A)
3. Back neck facing - cut 1 (C)

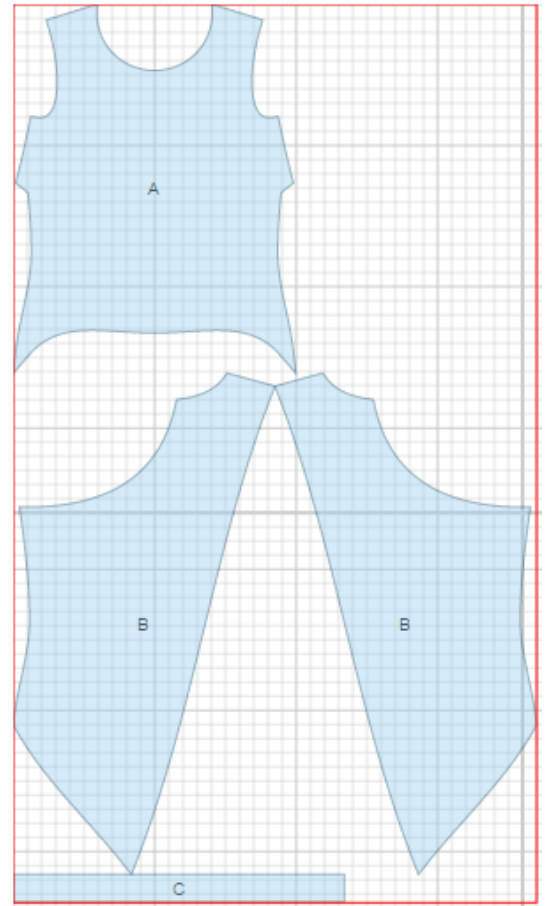

INSTRUCTIONS:

1. Sew bust darts, press them upwards.
2. Pin left back over right back. Sew right shoulder seam, serge and press towards back. Sew side seams, serge and press towards back.
3. Serge armhole, hem and center back edges. Turn edges under and topstitch.
4. Press back neck facing in half lengthwise wrong sides together. Turn edges under and press. Finish neckline with facing.
5. Sew and serge left shoulder seam.

TECHNICAL DRAWING:

