

Recommendations on fabric: natural or mixed fabric suitable for blouses, lace.


Seam allowances: on hem - 1.5 cm, sleeve edge - 1.2 cm, other seams – 1.0 cm.

Note on seam allowances:

- If the pattern has double contour the seam allowances are included. They are 1 cm unless specified otherwise.
- If the pattern has single contour, the seam allowances are NOT included and need to be added when laying out the pattern.

Note on length of fabric:

Attention! The amount of fabric needed for your pattern is not included. It will depend on the selected pattern size, the width, and design of the fabric you plan to use. First, print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm). Measure how much fabric you will need. Don't forget to account for pieces that need to be cut multiple times and pieces that are cut on the fold.

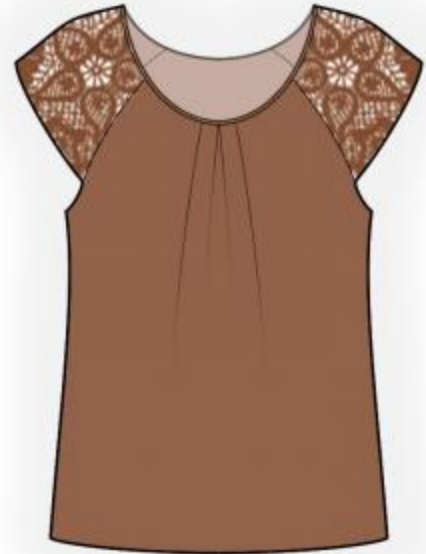


CUTTING:

Main fabric:

1. Back – cut 1 on fold (A)
2. Front - cut 1 on fold (B)

Lace:

1. Sleeve - cut 2 (C)

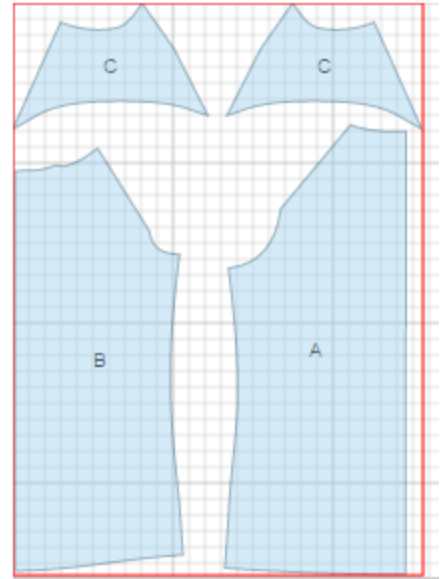

INSTRUCTIONS:

1. Make and fasten box pleats on front neck.
2. Serge lower edge of sleeve, turn under and topstitch.
3. Sew sleeve to front and back. Serge and press seam towards sleeve.
4. Cut (or use ready-made) bias tape that is 4 cm wide. Length is equal to neckline edge +5 cm. Fold bias tape in half lengthwise wrong sides together and press. Place bias tape on neckline from right side and sew. Clip into seam allowance. Turn bias tape to wrong side and topstitch along the fold onto main piece. Press.

5. Sew side seams. Serge and press towards back.

6. Cut a bias tape that is 4 cm wide. Length is equal to lower part of armhole +4 cm. Fold bias tape in half lengthwise wrong sides together and press. Place bias tape on armhole from right side and sew. Clip into seam allowance. Turn bias tape to wrong side and topstitch along the fold onto main piece.

7. Serge lower edge of blouse, turn under, press and topstitch.

TECHNICAL DRAWING:

