

Recommendations on fabric: natural/mixed soft non fraying, low stretch-knit fabric.

You will also need: decorative clasp.

Seam allowances: 1 cm for all seams, 0 cm for garment hem, front edge and lower edge of sleeve.

Note on seam allowances:

- If the pattern has double contour the seam allowances are included. They are 1 cm unless specified otherwise.

- If the pattern has single contour, the seam allowances are NOT included and need to be added when laying out the pattern.

Note on length of fabric:


Attention! The amount of fabric needed for your pattern is not included. It will depend on the selected pattern size, the width, and design of the fabric you plan to use. First, print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm). Measure how much fabric you will need. Don't forget to account for pieces that need to be cut multiple times and pieces that are cut on the fold.



CUTTING:

Main fabric:

1. Back - cut 1 on fold (A)
2. Left front - cut 1 (B)
3. Right front - cut 1 (C)
4. Belt – cut 1 (D)
5. Sleeve – cut 2 (E)

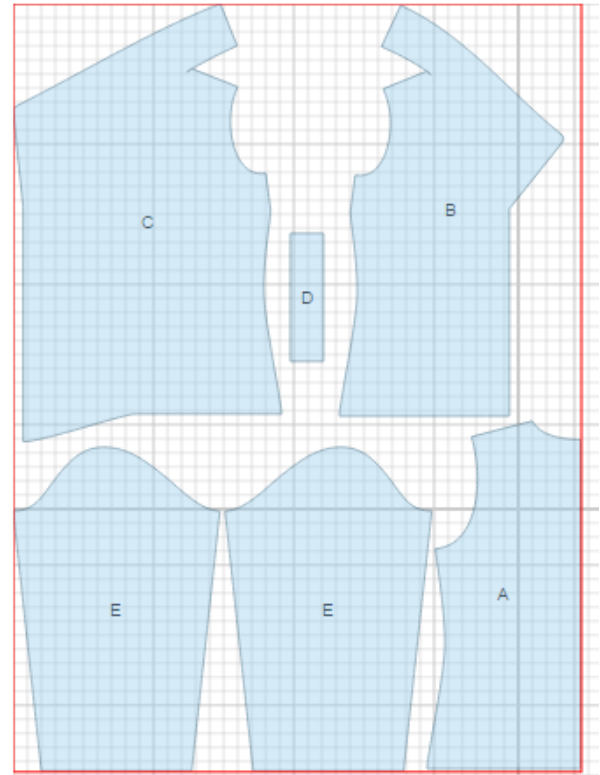

INSTRUCTIONS:

1. Sew darts on fronts. Trim bulk off if desired and press downwards.
2. Press long edges of belt under at 1 cm. Thread belt through the clasp and topstitch on left front as marked.
3. Sew collar seam placing fronts wrong sides together, press seam open. Sew, press open, and serge shoulder seams. Clip into seam allowance of front shoulder seam and sew collar into back neckline. Press seam open.
4. Sew sleeves into armholes matching notches and adjusting ease, press.
6. Sew side and sleeve seam with one continuous stitch. press.
7. Cut a bias tape of 3 cm wide and 5 cm long. Fold bias tape in half lengthwise right sides together and sew at 0.3 cm from fold. Trim seam and turn piece right side out. Adjust loop length. Sew loop from wrong side of right front as marked.

TECHNICAL DRAWING:

