

Recommendations on fabric: natural/mixed denim fabric.

You will also need: fusible interfacing.

Seam allowances: 1 cm for all seams, 3 cm for garment hem and lower edge of sleeve.

**Note on seam allowances:**

- If the pattern has double contour the seam allowances are included. They are 1 cm unless specified otherwise.
- If the pattern has single contour, the seam allowances are NOT included and need to be added when laying out the pattern.

**Note on length of fabric:**

*Attention! The amount of fabric needed for your pattern is not included. It will depend on the selected pattern size, the width, and design of the fabric you plan to use. First, print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm). Measure how much fabric you will need. Don't forget to account for pieces that need to be cut multiple times and pieces that are cut on the fold.*




## CUTTING:

### Main fabric:

1. Left belt - cut 1 (A)
2. Right belt - cut 1 (B)
3. Back - cut 2 (C)
4. Front – cut 2 (D)
5. Front bands – cut 4 (E)
6. Back neck facing - cut 2 (F)
7. Sleeve - cut 2 (G)

### Fusible interfacing:

1. Front facing – cut 2 (E)
2. Back neck facing - cut 2 (F)

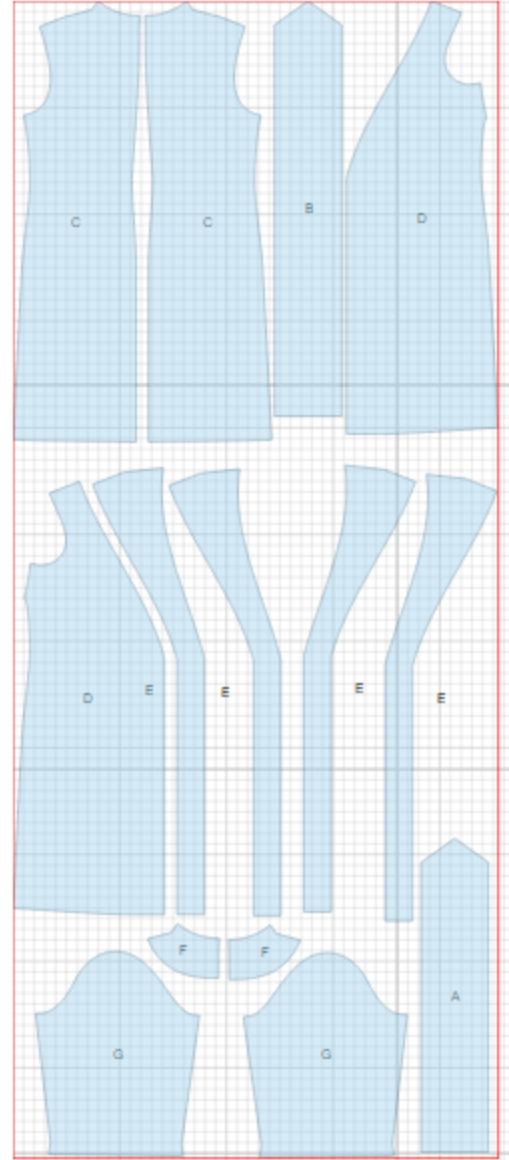

---

## INSTRUCTIONS:

1. Apply fusible interfacing to listed pieces.
2. Sew darts on fronts and backs. Press shoulder and back darts towards center, Press bust darts upwards.
3. Sew center back seam. Serge and press seam towards left.
4. Fold right and left belts right sides together and sew long and slanting sides. Trim seam in corners. Turn belts right side out, straighten and press.
5. Sew center back seam of back neck facing, press open. Pin facing to neckline right sides together and sew along neckline. Clip seam on curves. Turn facing to inside, straighten and press.
6. Sew side seams inserting left belt into left side seam. Serge and press seams towards back.
7. Serge hem of garment, turn under and topstitch with double stitch.
8. Sew outer front band to front, press seam towards front.
9. Serge outer edge of inner front band. Pin inner and outer bands right sides together. Sew lower corner, front edge and shoulder seams placing back between front band pieces and inserting right f belt at mark. Clip seam on curves, trim in corners, turn inner band to wrong side, straighten seams and press. Topstitch front band connection seam with double stitch.
10. Sew sleeve seam. Serge and press seam. Make a gathering stitch along sleeve cap to adjust ease. Sew sleeves into armholes matching notches and adjusting ease, serge and press.
11. Serge lower edge of sleeve. Turn under and topstitch with double stitch.

TECHNICAL DRAWING:

