

Recommendations on fabric: natural or mixed, low stretch knit fabric.

You will also need: elastic, cord for waistband..

Seam allowances: hem – 2.0 cm; all other seams - 1.0 cm.

Note on seam allowances:

- If the pattern has double contour the seam allowances are included. They are 1 cm unless specified otherwise.
- If the pattern has single contour, the seam allowances are NOT included and need to be added when laying out the pattern.

Note on length of fabric:


Attention! The amount of fabric needed for your pattern is not included. It will depend on the selected pattern size, the width, and design of the fabric you plan to use. First, print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm). Measure how much fabric you will need. Don't forget to account for pieces that need to be cut multiple times and pieces that are cut on the fold.



CUTTING:

Main fabric:

1. Back waistband - cut 1 (A)
2. Front waistband — cut 1 (B)
3. Front — cut 2 (C)
4. Side — cut 2 (D)
5. Pocket sacking — cut 2 (E)
6. Back — cut 2 (F)

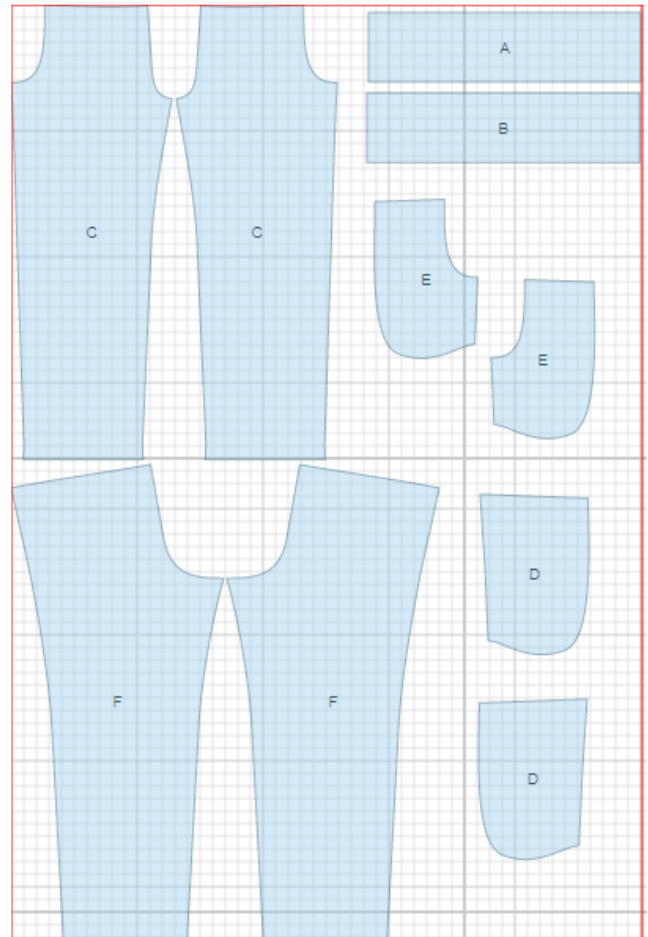

Advice: Knit fabric pieces are sewn together with special elastic or narrow zig-zag stitch. Seam allowance on hem is stitched with twin needles to save stretchiness. Pieces can also be sewn together with 3 or 4 – thread serger. When serging, cut seam allowances to 0.6 – 0.8 cm.

INSTRUCTIONS:

1. Pin sacking to front and sew pocket opening on a lockstitch machine. Clip seam on curves, turn sacking to inside and topstitch seam on sacking with 0.1 cm stitch. Press.
2. Pin front on side piece according to marking. Sew sacking to side piece, serge seam. Pin sacking to front on upper and side edges.
3. Sew center back seam, serge and press seam towards left side. Sew center front seam, serge and press seam towards left side.
4. Sew side seams. Serge and press seams towards back. Sew inner leg seams. Serge and press towards back.
5. Mark lines for elastic on waistbands. Make two eyelets for cord on front waistband. Sew waistbands together into ring. Sew elastic into ring. Fold and press waistband in half lengthwise wrong sides together. Set elastic into waistband, stretch to waistband length and topstitch with two stitches. Sew waistband to trousers, serge seam. Thread the cord.
6. Serge bottom edge of trousers, turn under, press and topstitch.

TECHNICAL DRAWING:

