

## Sewing Pattern — Skirt 4073

Recommendations on fabric: natural or mixed suiting fabric, guipure or lace

You will also need: lining, fusible interfacing, invisible skirt zipper

If the pattern has a double line around it, the seam allowances are included.

**Note:** By default, seam allowances are NOT included (single line) and will need to be added when laying out and cutting details.

Seam allowances: on hem of the garment on main fabric details – 2 cm, on hem of the garment on lining details and guipure inset – 1.5 cm, on section from notch to hem on right and left front parts — 1.5 cm, all other seams – 1 cm

Attention! First of all, please print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm) to see how much fabric you will need. Don't forget to take into account pieces to be duplicated or cut on a fold.

When sewing the garment, pay attention to notches, they must match up with corresponding pieces.

### **CUTTING:**

The word, “beam” used on some patterns means “straight of grain”. Some pieces will be cut on the fold, this is noted on the pattern piece. Mark all notches and other design features such as darts, pleats etc. from the pattern onto your fabric.

#### Main fabric:


1. Back part – 1 detail
2. Right front part – 1 detail
3. Left front part – 1 detail
4. Back facing – 1 detail
5. Front facing – 1 detail

#### Lining:

1. Back half — 1 detail
2. Top part of lining — 1 detail
3. Side part of lining — 2 details

#### Guipure:

1. Inset — 1 detail

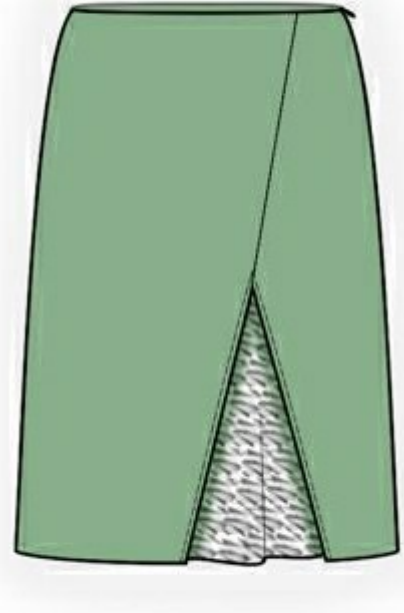

Interfacing:

1. Back facing – 1 detail
2. Front facing – 1 detail

**INSTRUCTIONS:**

1. Apply interfacing to facings. Apply interfacing to slanting edge on right front. The width of fusible tape is 1.5 cm.
2. Sew fronts from top edge up to mark. Trim seam allowances on details near the mark. Serge connecting seam from top edge up to mark and press it to right side seam. Serge and press seam allowances along slit on right and left details.
3. Sew darts on back part, press depths toward center.
4. Sew right side edge. Serge seam and press it to back. Serge separately left side edge. Sew left side edge from zipper mark down to hem. Press seams apart. Sew in zipper, press seam.
5. Serge hem, press and slip-stitch. Topstitch seam allowances along slit on front half along the fold at 0.7 cm. Make barred end in slit corner.
6. Stitch guipure inset to side parts of lining. Serge seam and press it to side seam. Stitch top part of lining, serge and press seam upwards. On lining of back half make the darts as soft pleats and fasten. Sew, serge and press right side edge of lining. Sew, serge and press right side edge of the facings. Stitch facings to lining, serge and press downwards. Sew left side edge of lining, leaving a slit for zipper. Serge and press the seam.
7. Place lining and skirt right sides together and stitch on upper edge. Topstitch seam allowances onto the facing at 0.2 cm off the seam. Lining turn to wrong side, press. Turn inside open edges of lining and sew to zipper tape. Serge lower edge of lining, turn inside and topstitch.

**TECHNICAL DRAWING:**

