

## Skirt With Yoke - Sewing Pattern #2079

Recommendations on fabric: well draping natural/mixed fabrics.

You will also need: fusible interfacing; 9 buttons.


Seam allowances: all seams 1 cm. Seam allowance along hem 2 cm.

### Note on seam allowances:

- If the pattern has double contour the seam allowances are included. They are 1 cm unless specified otherwise.
- If the pattern has single contour, the seam allowances are NOT included and need to be added when laying out the pattern.

### Note on length of fabric:

*Attention! The amount of fabric needed for your pattern is not included. It will depend on the selected pattern size, the width, and design of the fabric you plan to use. First, print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm). Measure how much fabric you will need. Don't forget to account for pieces that need to be cut multiple times and pieces that are cut on the fold.*

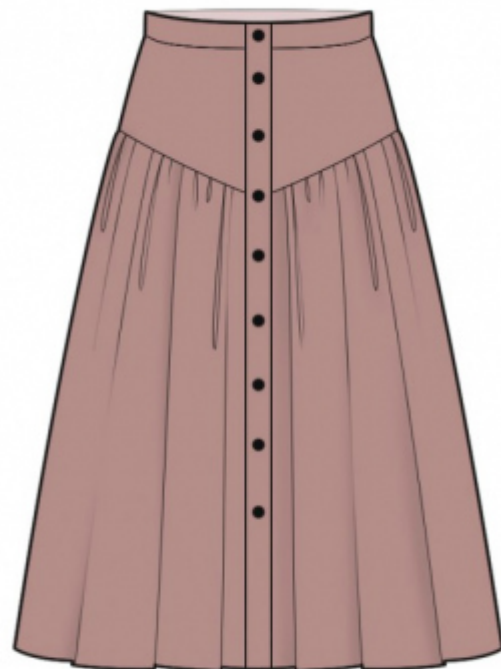

## CUTTING:

### Note on cutting:

*On the pattern pieces, "beam" means straight of grain. Lay out your pieces accordingly. Some pieces will be cut on the fold. This is noted on the pattern piece. Mark all notches and other design features such as pleats etc. from the pattern onto your fabric.*

*When sewing the garment, pay attention to notches, they must match up.*

Main fabric:

1. Back - cut 1 on fold
2. Back yoke - cut 1 on fold
3. Front skirt - cut 2
4. Front yoke - cut 2
5. Belt - cut 1
6. Placket - cut 2

Fusible interfacing:

1. Belt - cut 1
2. Placket - cut 2

## **INSTRUCTIONS:**

1. Apply fusible interfacing to belt.
2. Sew a gathering stitch along the upper edge of back skirt and gather fullness. Sew yoke to back skirt. Serge and press towards top.
3. Sew a gathering stitch along upper edge of front skirt and gather fullness. Sew yoke to front. Serge and press towards top.
4. Sew and serge side edges, press seams towards back.
5. Serge hem of skirt, press onto wrong side and topstitch.
6. Fold placket in half lengthwise and sew lower corner. Start and stop stitching exactly at the marked placket seam. Sew outer side of placket to skirt. Fold under seam allowance of the inner side and stitch-in-the-ditch into the seam of the outer side.
7. Sew outer side of belt to upper edge of skirt. Sew ends of belt, trim corners and turn right side out. Turn inner edge of the belt under and stitch in the ditch. Press the belt.
8. Mark and make buttonholes. Sew on buttons.

## **TECHNICAL DRAWING:**

