

Sewing Pattern – Blouse 4017

Recommendations on fabric: fabric suitable for blouse.


You will also need: fusing, 6 buttons.

Seam allowances are NOT included and need to be added when laying out and cutting details.

Seam allowance 1 cm on all edges. Seam allowance on hem - 2 cm, outer seam allowance of flounce - 0 cm, upper edges of back and front part - 2 cm.

Attention! First of all please print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm) to see how much fabric you will need. Don't forget to count pair parts and symmetrical parts.

When sewing the garment, pay attention to notches, they must coincide.

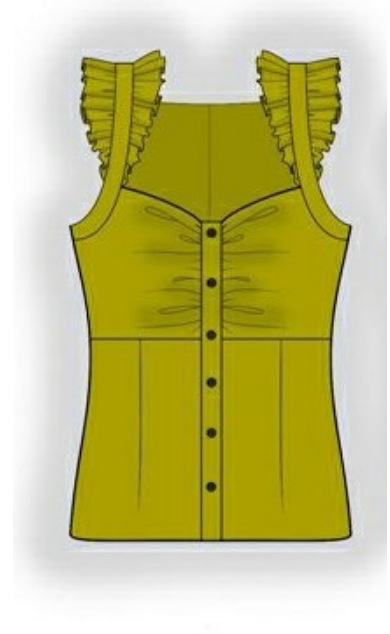

CUTTING:

Fabric:

- 1.Upper front part - 2 details.
- 2.Lower front part - 2 details.
- 3.Central back part - 2 details.
- 4.Side back part - 2 details.
- 5.Facing/buttonstand - 2 details.
- 6.Strap - 4 details.
- 7.Flounce - 4 details.

Fusing:

- 1.Facing/buttonstand - 2 details.
- 2.Strap - 2 details.

INSTRUCTIONS:

1. Apply fusing to upper facings and upper straps.
2. Mark and sew darts on lower front part. Press dart depths towards center.
3. Serge upper edge of upper front part, fold inside and topstitch.
4. Sew together upper and lower front parts. Serge the seam and press downwards.
5. Sew relieve seam of back part. Serge the seam and press towards center. Sew central back seam. Serge the seam and press to the left. Serge the upper edge of the back piece, fold inside and topstitch.
6. Sew side seam, serge it and press onto the back piece.
7. Sew side edges of straps. Press apart seams. Overstitch the outer edge of flounce with a rolled seam. Stitch loosely along the inner edge of flounce and gather ruffles. Sew flounce to upper strap. Put together upper and lower straps right sides together (the flounce is inside) and sew inner seam. Slash seam allowances and turn the right side out. Sew lower strap to the blouse. Fold seam allowance of upper strap inside and topstitch into edge.
8. Serge blouse hem, press seam allowance onto wrong side and topstitch.
9. Stitch loosely along the edge of upper front part and gather ruffles. Sew upper facing to front part. Fold lower facing to the right side and overstitch upper and lower corners. Slash corners and turn to the right side. Fold seam allowance of lower facing inside and topstitch.
10. Make buttonholes into the right front part, sew buttons onto the left front part.

TECHNICAL DRAWING:

