

Pyjama Pants - Sewing Pattern #2271

Recommendations on fabric: natural/mixed knit fabric of small/medium stretchiness.

You will also need: elastic tape.

Seam allowances: all seams 1 cm, seam allowance along the hem 2 cm.

Note on seam allowances:

- If the pattern has double contour the seam allowances are included. They are 1 cm unless specified otherwise.
- If the pattern has single contour, the seam allowances are NOT included and need to be added when laying out the pattern.

Note on length of fabric:

Attention! The amount of fabric needed for your pattern is not included. It will depend on the selected pattern size, the width, and design of the fabric you plan to use. First, print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm). Measure how much fabric you will need. Don't forget to account for pieces that need to be cut multiple times and pieces that are cut on the fold.

Note on working with stretchy fabric:

Knitted fabric pieces are sewn together with special elastic or narrow zig-zag stitch. Seam allowance on hems can be stitched with twin needles to save stretchiness. Pieces can also be sewn together with a serger. When serging, cut seam allowances to 0.6 – 0.8 cm.

CUTTING:


Note on cutting:

On the pattern pieces, "beam" means straight of grain. Lay out your pieces accordingly. Some pieces will be cut on the fold. This is noted on the pattern piece. Mark all notches and other design features such as pleats etc. from the pattern onto your fabric.

When sewing the garment, pay attention to notches, they must match up.

Main fabric:

1. Back half – cut 2
2. Front half – cut 2

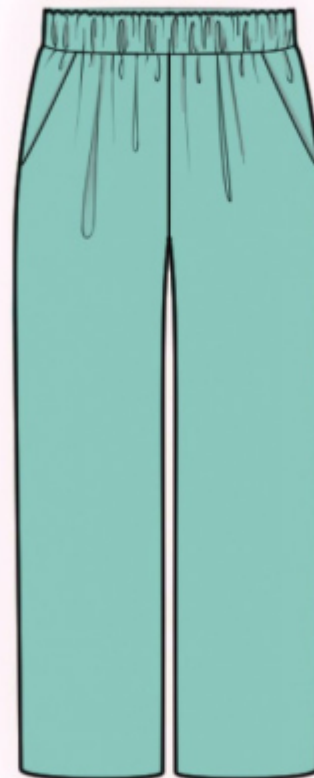

3. Belt - cut 1
4. Pocket bag - cut 2
5. Side - cut 2

INSTRUCTIONS:

1. Pin pocket bag onto front half and sew pocket opening. Turn pocket bag onto the wrong side, topstitch seam allowances onto pocket bag at 0.1 cm and press.
2. Pin front half onto side according to markings. Sew pocket bag to side, serge. Baste pocket bag to front half along the upper and side edges.
3. Sew center seam on back halves, press towards left and serge. Sew center seam on front halves, press towards left and serge.
4. Sew side seams, seam allowances press towards back and serge. Sew the inside leg edges, seam allowances press towards back and serge.
5. Sew waistband into a ring, press seam apart. Press belt in half lengthwise right side out. Measure a required length of the elastic tape and sew into ring. Insert elastic band into the belt, slipstitch according to markings. Sew belt to the pants, serge. The belt seam is placed at the left side seam.
6. Serge hem of pants, press onto wrong side and topstitch.

TECHNICAL DRAWING:

