

Skirt With Inset - Sewing Pattern #2439

Recommendations on fabric: thick natural/mixed fabrics suitable for skirts.

You will also need: fusible interfacing; 1 button; dress zipper.


Seam allowances: all seams 1 cm. Seam allowance along hem 2 cm, lower edges of inset - 2 cm.

Note on seam allowances:

- If the pattern has double contour the seam allowances are included. They are 1 cm unless specified otherwise.
- If the pattern has single contour, the seam allowances are NOT included and need to be added when laying out the pattern.

Note on length of fabric:

Attention! The amount of fabric needed for your pattern is not included. It will depend on the selected pattern size, the width, and design of the fabric you plan to use. First, print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm). Measure how much fabric you will need. Don't forget to account for pieces that need to be cut multiple times and pieces that are cut on the fold.

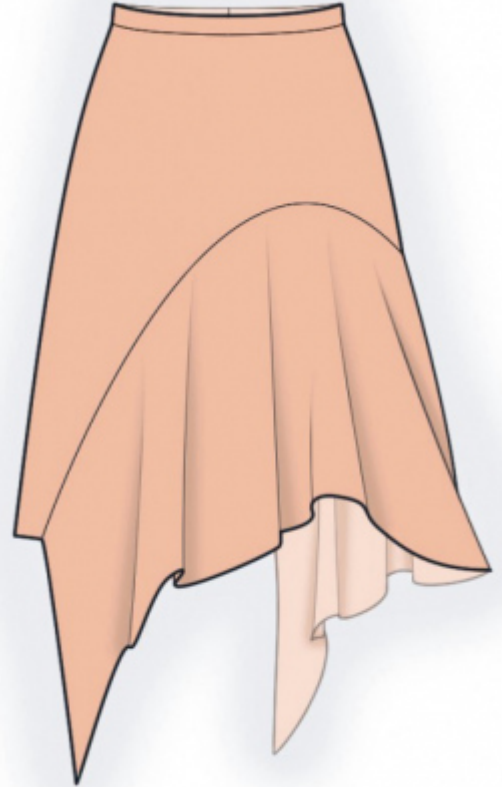

CUTTING:

Note on cutting:

On the pattern pieces, "beam" means straight of grain. Lay out your pieces accordingly. Some pieces will be cut on the fold. This is noted on the pattern piece. Mark all notches and other design features such as pleats etc. from the pattern onto your fabric.

When sewing the garment, pay attention to notches, they must match up.

Main fabric:

1. Front skirt - cut 1
2. Right back skirt - cut 1
3. Left back skirt - cut 1
4. Inset - cut 1
5. Belt - cut 1

Fusible interfacing:

1. Belt - cut 1

INSTRUCTIONS:

1. Apply fusible interfacing to belt.
2. Serge back center edges separately. Sew the seam from zipper marker down to hem. Press seam apart. Sew in zipper.
3. Sew and serge side edges, press seams towards back.
4. Sew inset to skirt. Serge and press towards inset.
5. Sew outer side of belt to upper edge of skirt. Sew ends of belt, trim corners and turn right side out. Turn inner edge of the belt under and stitch in the ditch. Press the belt.
6. Mark and make button loop. Sew on button.
7. Serge hem of skirt and hem of inset, press onto wrong side and topstitch.

TECHNICAL DRAWING:

