

Dress With Decorative Inset And Gathers - Sewing Pattern #2456

Recommendations on fabric: natural/mixed fabric suitable for dresses.

You will also need: dress zipper.


Seam allowances: all seams 1 cm; seam allowance for hem of dress and hem of sleeve - 1.5 cm.

Note on seam allowances:

- If the pattern has double contour the seam allowances are included. They are 1 cm unless specified otherwise.
- If the pattern has single contour, the seam allowances are NOT included and need to be added when laying out the pattern.

Note on length of fabric:

Attention! The amount of fabric needed for your pattern is not included. It will depend on the selected pattern size, the width, and design of the fabric you plan to use. First, print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm). Measure how much fabric you will need. Don't forget to account for pieces that need to be cut multiple times and pieces that are cut on the fold.

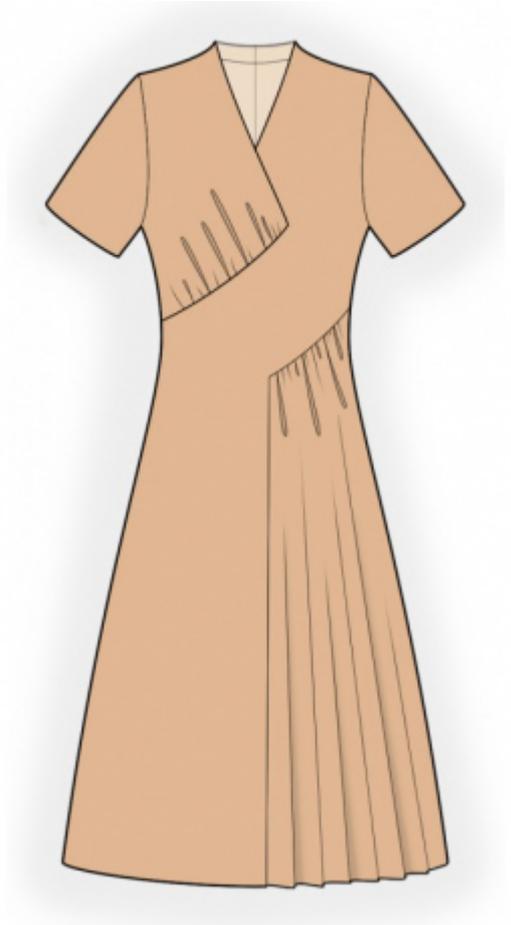

CUTTING:

Note on cutting:

On the pattern pieces, "beam" means straight of grain. Lay out your pieces accordingly. Some pieces will be cut on the fold. This is noted on the pattern piece. Mark all notches and other design features such as pleats etc. from the pattern onto your fabric.

When sewing the garment, pay attention to notches, they must match up.

Main fabric:

1. Upper center back - cut 2
2. Upper side back - cut 2
3. Lower center back - cut 2
4. Lower side back - cut 2
5. Upper right front - cut 1
6. Middle front - cut 1
7. Left lower front - cut 1

8. Sleeve - cut 2

INSTRUCTIONS:

1. Sew princess seams on upper back, press towards center, serge. Sew princess seams of lower back (sew side backs to center back), clipping into the corner of seam allowance of central part, press towards center, serge. Sew upper back to lower back, press seam allowances towards top and serge.
2. Sew dart on middle front, press bulk towards top.
3. Sew a gathering stitch along the lower edge of upper right front and gather fullness. Serge the outer edge of the on-piece center front facing, press onto wrong side.
4. Serge the outer edge of the on-piece center front facing on middle front, press onto wrong side. Sew upper front to center front, clipping into corner, serge and press.
5. Sew a gathering stitch along the upper edge of left lower front and gather fullness. Sew lower front to middle front, clipping into corner, serge and press.
6. Clip into the corner of seam allowance of shoulder seam on front. Sew shoulder seams, press seams towards back and serge. Sew outer stand collar into back neckline, press seam allowances towards collar. Baste the seam allowance of inner stand collar to the seam and stitch-in-the-ditch.
7. Sew side seams, press seams towards back and serge.
8. Serge center back edges separately on each piece. Sew center back seam from notch to bottom edge, press seam apart. Sew in zipper.
9. Sew sleeve seam, press towards back and serge. Sew sleeves into armholes, serge and press.
10. Serge hem of dress and hem of sleeve, press onto wrong side and topstitch.

TECHNICAL DRAWING:

