

Asymmetrical Skirt - Sewing Pattern #2593

Recommendations on fabric: well draping natural/mixed fabrics suitable for skirts.

You will also need: fusible interfacing; 1 button; dress zipper.


Seam allowances: all seams 1 cm. Seam allowance along the lower edges - 1.5 cm.

Note on seam allowances:

- If the pattern has double contour the seam allowances are included. They are 1 cm unless specified otherwise.
- If the pattern has single contour, the seam allowances are NOT included and need to be added when laying out the pattern.

Note on length of fabric:

Attention! The amount of fabric needed for your pattern is not included. It will depend on the selected pattern size, the width, and design of the fabric you plan to use. First, print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm). Measure how much fabric you will need. Don't forget to account for pieces that need to be cut multiple times and pieces that are cut on the fold.

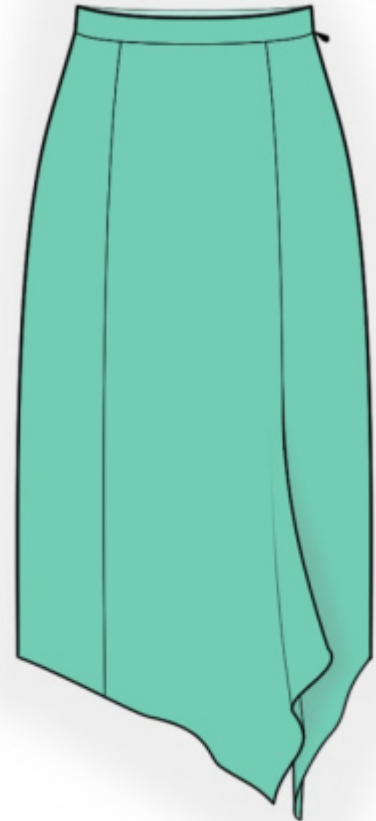

CUTTING:

Note on cutting:

On the pattern pieces, "beam" means straight of grain. Lay out your pieces accordingly. Some pieces will be cut on the fold. This is noted on the pattern piece. Mark all notches and other design features such as pleats etc. from the pattern onto your fabric.

When sewing the garment, pay attention to notches, they must match up.

Main fabric:

1. Back - cut 1 on fold
2. Front right skirt - cut 1
3. Front left skirt - cut 1
4. Front central skirt - cut 1
5. Belt - cut 1

Fusible interfacing:

1. Belt - cut 1

INSTRUCTIONS:

1. Apply fusible interfacing.
2. Sew darts on the back skirt, press bulk towards center of pieces.
3. Sew side fronts to front. Serge seams and press towards center.
4. Serge separately left side edges. Sew left side seam from notch for zipper to bottom. Press the seam apart. Sew in zipper. Sew right side seam, press seam allowances towards back and serge.
5. Fold belt in half lengthwise, right sides together and sew the shorter side and the corner. Start stitching exactly at the marked line of seam between belt and skirt. Clip into seam allowances near the notch, belt turn right side out and press. Sew outer edge of belt to upper edge, turn inner edge under and topstitch into seam of.
6. Serge seam allowance along hem, fold inside onto wrong side and topstitch. You may also finish the edge with baby hem, in this case trim away the seam allowance to 0.5 cm.
7. Make buttonhole on belt. Sew on a button.

TECHNICAL DRAWING:

