

Skirt With Wide Waistband - Sewing Pattern #2641

Recommendations on fabric: thin soft natural/mixed suiting fabrics.

You will also need: fusible interfacing, dress zipper, 8 buttons.


Seam allowances: all seams 1 cm. Seam allowance for hem - 2 cm.

Note on seam allowances:

- If the pattern has double contour the seam allowances are included. They are 1 cm unless specified otherwise.
- If the pattern has single contour, the seam allowances are NOT included and need to be added when laying out the pattern.

Note on length of fabric:

Attention! The amount of fabric needed for your pattern is not included. It will depend on the selected pattern size, the width, and design of the fabric you plan to use. First, print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm). Measure how much fabric you will need. Don't forget to account for pieces that need to be cut multiple times and pieces that are cut on the fold.

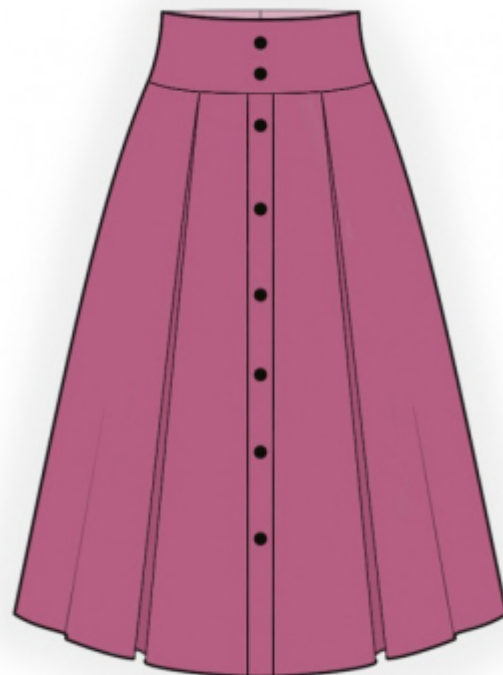

CUTTING:

Note on cutting:

On the pattern pieces, "beam" means straight of grain. Lay out your pieces accordingly. Some pieces will be cut on the fold. This is noted on the pattern piece. Mark all notches and other design features such as pleats etc. from the pattern onto your fabric.

When sewing the garment, pay attention to notches, they must match up.

Main fabric:

1. Back - cut 2
2. Front skirt - cut 1 on fold
3. Front yoke - cut 2
4. Back yoke - cut 4
5. Placket - cut 1

Fusible interfacing:

1. Back yoke - cut 2
2. Front yoke - cut 1

INSTRUCTIONS:

1. Apply fusible interfacing.
2. Make and baste the box pleat on the back skirt. Sew back yoke to back skirt, press towards top.
3. Serge center edges of the back skirt separately. Sew center seam from notch for zipper to hem. Press the seam apart. Sew in zipper.
4. Make and baste the double pleat on the front skirt.
Fold inside the longer edges of placket and press. Pin placket onto skirt and topstitch according to markings. Sew front yoke to front skirt, press towards top.
5. Sew side seams, press towards the back and serge.
6. Sew side seams of inside yokes, press the seam apart. Serge lower edge. Pin yoke onto skirt right sides together and sew upper edge. Seam Allowances topstitch at yoke at 0.2 cm from the seam. Fold yoke onto the wrong side, press. Fold inside the middle edges and sew to zipper tape. Topstitch yoke into the seam of outer yoke (stitch-in-the-ditch).
7. Serge lower edge of garment, press onto wrong side and topstitch.
8. Sew on decorative buttons on the placket and on the front yoke.

TECHNICAL DRAWING:

