

## Skirt With Yoke And Gathers - Sewing Pattern #2638

Recommendations on fabric: thin natural/mixed suiting fabrics.

You will also need: fusible interfacing; 1 button; dress zipper.


Seam allowances: all seams 1 cm. Seam allowance along the lower edges - 2 cm.

### Note on seam allowances:

- If the pattern has double contour the seam allowances are included. They are 1 cm unless specified otherwise.
- If the pattern has single contour, the seam allowances are NOT included and need to be added when laying out the pattern.

### Note on length of fabric:

Attention! The amount of fabric needed for your pattern is not included. It will depend on the selected pattern size, the width, and design of the fabric you plan to use. First, print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm). Measure how much fabric you will need. Don't forget to account for pieces that need to be cut multiple times and pieces that are cut on the fold.

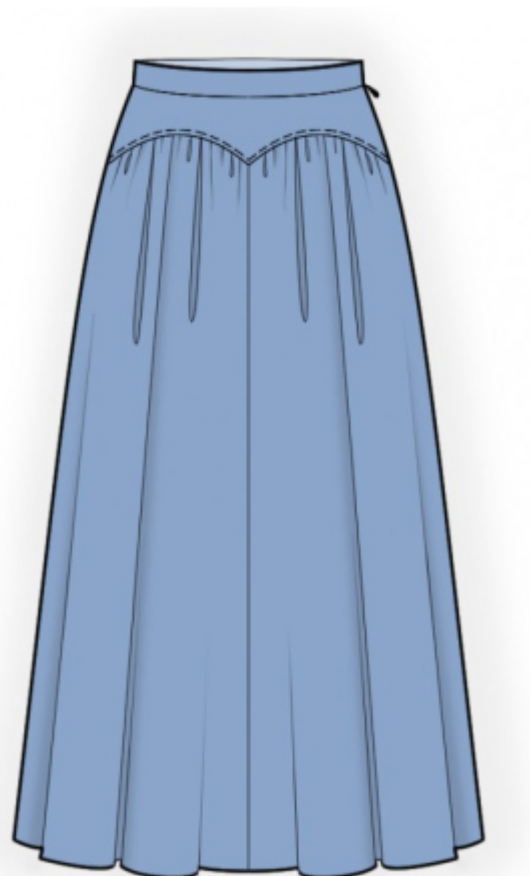

## CUTTING:

### Note on cutting:

On the pattern pieces, "beam" means straight of grain. Lay out your pieces accordingly. Some pieces will be cut on the fold. This is noted on the pattern piece. Mark all notches and other design features such as pleats etc. from the pattern onto your fabric.

When sewing the garment, pay attention to notches, they must match up.

Main fabric:

1. Back yoke - cut 1
2. Back - cut 2
3. Front skirt - cut 2
4. Front yoke - cut 1
3. Belt - cut 1

Fusible interfacing:

1. Belt - cut 1

**INSTRUCTIONS:**

1. Apply fusible interfacing.
2. Sew center seam of back skirt, press towards left and serge.
3. Sew a gathering stitch along the upper edge of the back skirt and gather fullness. Sew yoke to back skirt, press seam allowances towards top and serge. Sew a decorative stitch line at 0.5 cm from the seam.
4. Sew center seam on front skirt, press towards left and serge.
5. Sew a gathering stitch along the upper edge of the front skirt and gather fullness. Sew yoke to front, press seam allowances towards top and serge. Sew a decorative stitch line at 0.5 cm from the seam.
6. Left side edges serge separately. Sew left side seam from notch for zipper to hem. Press the seam apart. Sew in zipper. Sew right side seam, seam allowances press towards back and serge.
7. Fold belt in half lengthwise, right sides together and sew the shorter side and the corner. Start stitching exactly at the marked line of seam between belt and skirt. Snip into seam allowances near mark, belt turn right side out and press. Sew outer edge of belt to upper edge, turn inner edge under and topstitch into seam of.
8. Seam allowance for hem serge, press onto wrong side and topstitch.
9. Make buttonhole on belt. Sew on a button.

**TECHNICAL DRAWING:**

