

Asymmetrical Wrap Skirt - Sewing Pattern #2668

Recommendations on fabric: natural/mixed fabrics suitable for skirts.

You will also need: fusible interfacing, 6 buttons, decorative buckle.


Seam allowances: all seams 1 cm. Seam allowance for hem - 3 cm.

Note on seam allowances:

- If the pattern has double contour the seam allowances are included. They are 1 cm unless specified otherwise.
- If the pattern has single contour, the seam allowances are NOT included and need to be added when laying out the pattern.

Note on length of fabric:

Attention! The amount of fabric needed for your pattern is not included. It will depend on the selected pattern size, the width, and design of the fabric you plan to use. First, print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm). Measure how much fabric you will need. Don't forget to account for pieces that need to be cut multiple times and pieces that are cut on the fold.

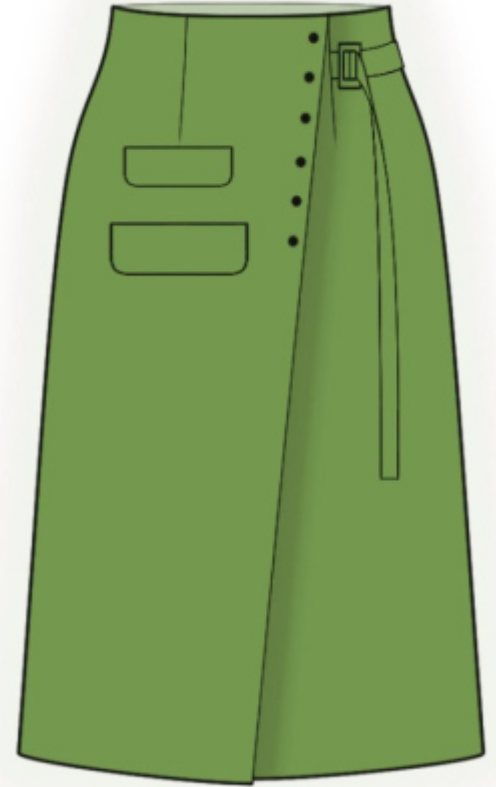

CUTTING:

Note on cutting:

On the pattern pieces, "beam" means straight of grain. Lay out your pieces accordingly. Some pieces will be cut on the fold. This is noted on the pattern piece. Mark all notches and other design features such as pleats etc. from the pattern onto your fabric.

When sewing the garment, pay attention to notches, they must match up.

Attention! Pattern blocks have markings and texts from the right side. Take this into account when cutting the fabric-some of the pattern blocks need to be laid onto fabric with their wrong side on top.

Main fabric:

1. Back - cut 1 on fold
2. Front skirt - cut 1
3. Closure facing - cut 1
4. Button catch (zipper facing) - cut 1

5. Back facing - cut 1
6. Front facing right - cut 1
7. Front facing left - cut 1
8. Upper flap - cut 2
9. Lower flap - cut 2
10. Belt - cut 1
11. Strap - cut 1

Fusible interfacing:

1. Closure facing - cut 1
2. Button catch (zipper facing) - cut 1
3. Back facing - cut 1
4. Front facing right - cut 1
5. Front facing left - cut 1
6. Upper flap - cut 1
7. Lower flap - cut 1
8. Belt - cut 1
9. Strap - cut 1

INSTRUCTIONS:

1. Apply fusible interfacing.
2. Sew darts on back skirts, press the inner part towards center.
3. Fold belt in half lengthwise right sides together and sew along the shorter side and the longer side. Trim seam allowances in corners, belt turn right side out, straighten, press. Fold the strap in half lengthwise right sides together and sew along the shorter side and the longer side. Trim seam allowances in corners, strap turn right side out, straighten, press. Thread in the finished end of the strap into the buckle and sew.
4. Sew darts on front skirt, insert the strap into the left dart. Press the bulk towards the center.
5. Pin the facing closure to the right side of closure, right sides together and sew. Snip into seam allowance in the corner of the front skirt, fold the closure facing onto wrong side. Pin the button catch (zipper facing) with the left side of closure right sides together and sew. Snip into seam allowance in the corner of the front skirt, fold away button catch (zipper facing) onto wrong side. Pin the right side of closure onto the left side of closure, forming a pleat from the front skirt, and topstitch along the lower edge of the closure facing with double stitch line.
6. Sew flaps together by two, right sides together and sew three edges. Clip into curves, turn the flaps right side out, straighten, press. Serge upper edge. Pin lower flap at front skirt according to markings and sew (the serged edge is directed towards bottom). Fold flap down and topstitch onto main piece along the seam. Sew the upper flap in the same way.

7. Sew side seams, inserting into right side seam belt, press towards the back and serge.
8. Sew the front facings to the back facing, press the seam apart, serge lower edge. Pin the facing to the upper edge of the skirt, right sides together. Fold the strap and the closure facing onto the right side and sew the short sides of the facing to these. Sew the upper edge at the same time as the upper corners of the strap and the upper corners of the closure facing, trim away corners, turn the facing onto the wrong side and press.
9. Serge lower edge of garment, press onto wrong side and finish with hidden stitches.
10. Make buttonholes, sew on buttons correspondingly.

TECHNICAL DRAWING:

