

## High-Waist Skirt - Sewing Pattern #2674

Recommendations on fabric: natural/mixed suiting fabrics.

You will also need: fusible interfacing, dress zipper.


Seam allowances: all seams 1 cm. Seam allowance for hem - 3 cm.

### Note on seam allowances:

- If the pattern has double contour the seam allowances are included. They are 1 cm unless specified otherwise.
- If the pattern has single contour, the seam allowances are NOT included and need to be added when laying out the pattern.

### Note on length of fabric:

Attention! The amount of fabric needed for your pattern is not included. It will depend on the selected pattern size, the width, and design of the fabric you plan to use. First, print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm). Measure how much fabric you will need. Don't forget to account for pieces that need to be cut multiple times and pieces that are cut on the fold.

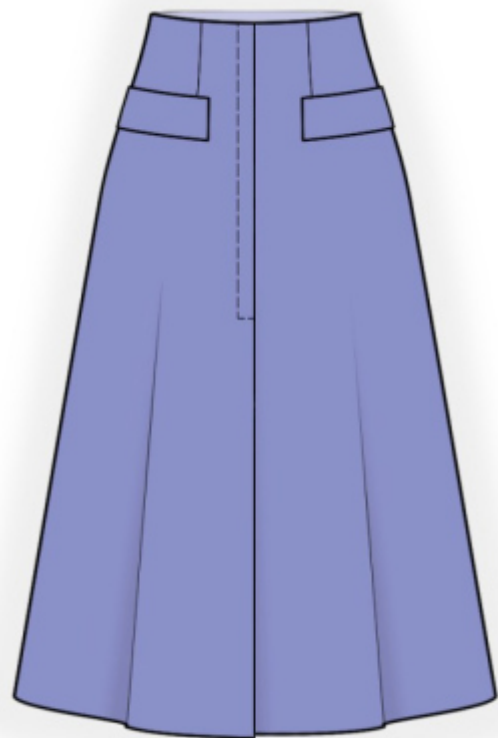

## CUTTING:

### Note on cutting:

On the pattern pieces, "beam" means straight of grain. Lay out your pieces accordingly. Some pieces will be cut on the fold. This is noted on the pattern piece. Mark all notches and other design features such as pleats etc. from the pattern onto your fabric.

When sewing the garment, pay attention to notches, they must match up.

Attention! Pattern pieces are drafted as seen from the right side, when cutting, please place them with the text and markings down onto the fabric.

Main fabric:

1. Back - cut 2
2. Right front skirt - cut 1
3. Left front skirt - cut 1

4. Back facing - cut 2
5. Front facing - cut 1
6. Flap - cut 2

Fusible interfacing:

1. Back facing - cut 2
2. Front facing - cut 1
3. Flap - cut 2

## **INSTRUCTIONS:**

1. Apply fusible interfacing.
2. Sew darts on back skirts, press the inner part towards center.
3. Serge center edges of backs separately. Sew the center back seam from zipper mark to hem, press the seam apart. Sew in zipper.
4. Sew darts on front skirts, press the inner part towards center.
5. Snip into the seam allowance of the vertical edge of the left front skirt near the mark. Serge both areas: from top to notch and from notch to bottom. Press seam allowance from notch to bottom onto wrong side and topstitch. Serge the vertical edge of the right front skirt. Fold the one-piece placket onto the wrong side and press. Pin the right skirt onto the left skirt, matching center lines, and topstitch according to markings.
6. Sew side seams, press towards the back and serge.
7. Pin together flaps in half lengthwise right sides together and sew along shorter edges. Trim away corners, turn the flaps right side out, straighten, press. Serge upper edge. Pin the flap onto garment according to markings and sew (the serged edge is directed towards bottom). Fold flap down and topstitch onto main piece along the seam.
8. Sew side seams of facings, press the seam apart, serge lower edge. Pin the facing to the upper edge of the skirt, right sides together and sew upper edge. Clip seam allowances, turn the facing onto the wrong side and press. Slipstitch to side seams and to zipper tape.
9. Serge lower edge of garment, press onto wrong side and finish with hidden stitches. Hem the vertical edge of the right skirt with hidden stitches.

**TECHNICAL DRAWING:**

