

Skirt With Gathers And Wrap Effect - Sewing Pattern #2820

Recommendations on fabric: soft natural/mixed fabric suitable for dresses.

You will also need: fusible interfacing, dress zipper.


Seam allowances: all seams 1 cm. Seam allowance for hem - 2 cm.

Note on seam allowances:

- If the pattern has double contour the seam allowances are included. They are 1 cm unless specified otherwise.
- If the pattern has single contour, the seam allowances are NOT included and need to be added when laying out the pattern.

Note on length of fabric:

Attention! The amount of fabric needed for your pattern is not included. It will depend on the selected pattern size, the width, and design of the fabric you plan to use. First, print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm). Measure how much fabric you will need. Don't forget to account for pieces that need to be cut multiple times and pieces that are cut on the fold.

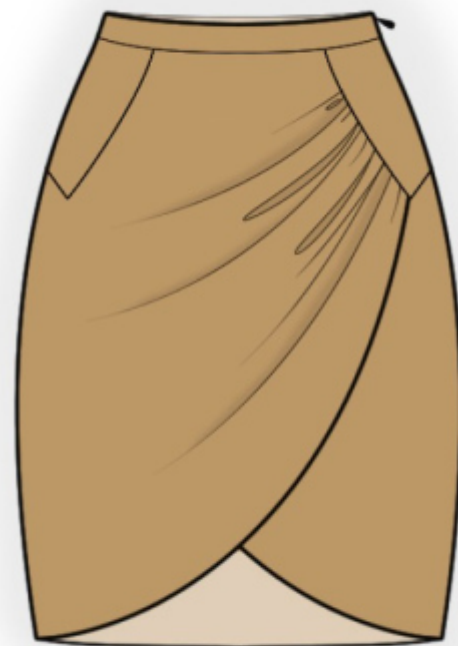

CUTTING:

Note on cutting:

On the pattern pieces, "beam" means straight of grain. Lay out your pieces accordingly. Some pieces will be cut on the fold. This is noted on the pattern piece. Mark all notches and other design features such as pleats etc. from the pattern onto your fabric.

When sewing the garment, pay attention to notches, they must match up.

Main fabric:

1. Center back - cut 1
2. Side back - cut 2
3. Front inset - cut 2
4. Right front skirt - cut 1
5. Left front skirt - cut 1
6. Back facing - cut 2
7. Front facing - cut 2

Fusible interfacing:

1. Back facing - cut 1
2. Front facing - cut 1

INSTRUCTIONS:

1. Apply fusible interfacing.
2. Sew side backs to center back, press towards center, serge. Sew the outer facing to the back skirt, press seam allowances towards placket.
3. Serge the seam allowances of the lower edges of front skirts, press seam allowances onto wrong side, topstitch. Sew a gathering stitch along the slanted edge of front skirt and gather fullness. Pin right front skirt onto left front skirt and baste together along raw edges.
4. Sew front insets to front skirt, slashing corners, press seam allowances down, serge.
5. Serge separately left side edges. Sew the seam from zipper mark down to hem (side edge of back is longer than side edge of front by the width of the hem seam allowance). Press the seam apart. Sew in zipper.
6. Sew right side seam (side edge of back is longer than side edge of front by the width of the hem seam allowance), press towards the back and serge.
7. Sew the right side seam of the inner facings, press the seam apart, serge lower edge. Pin facing to skirt right sides together and sew upper edge. Clip seam allowances, turn the facing onto the wrong side and press. Sew by hand to the seam allowances of the right side seam and to the zipper tape.
8. Serge the seam allowance along the lower edge of back, press onto wrong side and topstitch.

TECHNICAL DRAWING:

