

## Flared Skirt With Asymmetrical Yoke - Sewing Pattern #2849

Recommendations on fabric: natural/mixed fabrics suitable for skirts in contrasting or similar color.

You will also need: fusible interfacing, 1 dress zipper.


Seam allowances: all seams 1 cm. Seam allowance for hem - 2 cm.

### Note on seam allowances:

- If the pattern has double contour the seam allowances are included. They are 1 cm unless specified otherwise.
- If the pattern has single contour, the seam allowances are NOT included and need to be added when laying out the pattern.

### Note on length of fabric:

Attention! The amount of fabric needed for your pattern is not included. It will depend on the selected pattern size, the width, and design of the fabric you plan to use. First, print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm). Measure how much fabric you will need. Don't forget to account for pieces that need to be cut multiple times and pieces that are cut on the fold.

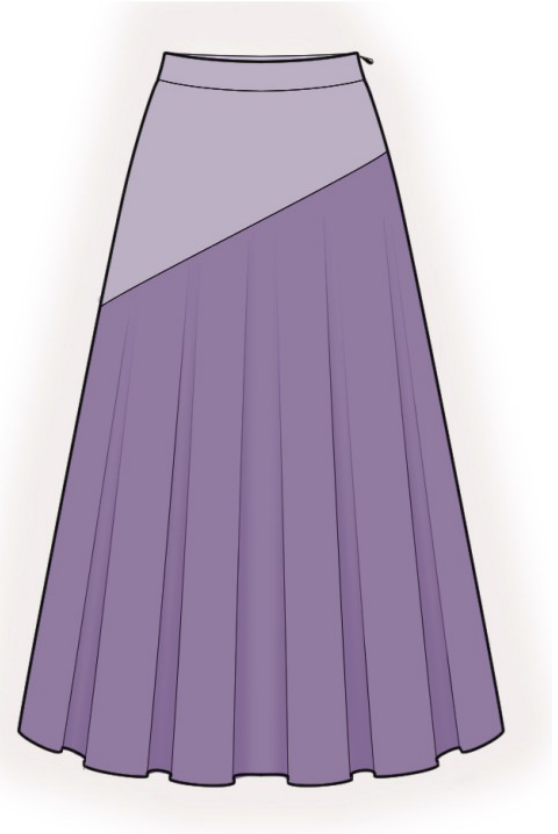

## CUTTING:

### Note on cutting:

On the pattern pieces, "beam" means straight of grain. Lay out your pieces accordingly. Some pieces will be cut on the fold. This is noted on the pattern piece. Mark all notches and other design features such as pleats etc. from the pattern onto your fabric.

When sewing the garment, pay attention to notches, they must match up.

Attention! Pattern blocks have markings and texts from the right side. Take this into account when cutting the fabric-some of the pattern blocks need to be laid onto fabric with their wrong side on top.

Main fabric:

1. Back - cut 1
2. Front skirt - cut 1
3. Back facing - cut 2
4. Front facing - cut 2

Main fabric 1:

1. Lower Front Skirt - cut 1
2. Lower back skirt - cut 1

Fusible interfacing:

1. Back facing - cut 1
2. Front facing - cut 1

## **INSTRUCTIONS:**

1. Apply fusible interfacing.
2. Sew front facing to front skirt, press the seam allowances towards the facing. Sew lower skirt to front skirt, press seam allowances towards top and serge.
3. Sew back facing to back skirt, press the seam allowances towards the facing. Sew lower skirt to back skirt, press seam allowances towards top and serge.
4. Serge separately left side seams. Sew left side seam, from notch for zipper to bottom. Sew in zipper.
5. Sew right side edge, press towards the back and serge.
6. Sew the side seams of the inner facings, press the seam apart, serge lower edge. Pin facing to skirt right sides together and sew upper edge. Clip seam allowances, turn the facing onto the wrong side and press. Sew side edges of facing to zipper tape by hand. Topstitch the facing into the seam of the outer facing.
7. Serge lower edge of garment, press onto wrong side and topstitch.

## **TECHNICAL DRAWING:**

