Sewing Pattern — Skirt 5906

Recommendations on fabric: silk

You will also need: bias tape

If the pattern has double contour the seam allowances are included.
If the pattern has single contour, the seam allowances are NOT included and need to be added when laying out and cutting details.

Seam allowances: on waist edge – 0 cm, all other seams - 1 cm

Attention! First of all please print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm) to see how much fabric you will need. Don't forget to count pair parts and symmetrical parts.

When sewing the garment, pay attention to notches, they must coincide.

CUTTING:

Main fabric:

1. Skirt - 1 detail

Recommendations on cutting: If skirt does not fit to fabric width, cut pattern into 3 parts according to fabric width. Cut parallel to grain straight. In this case do not forget to add seam allowances.

INSTRUCTIONS:

1. Serge straight edge of the skirt, turn inside, topstitch and press.
2. Serge lower edge from flounce corner up to straight edge with thin rolled seam, slightly stretching the edge.
3. Overstitch waist edge with bias tape, shaping ties.
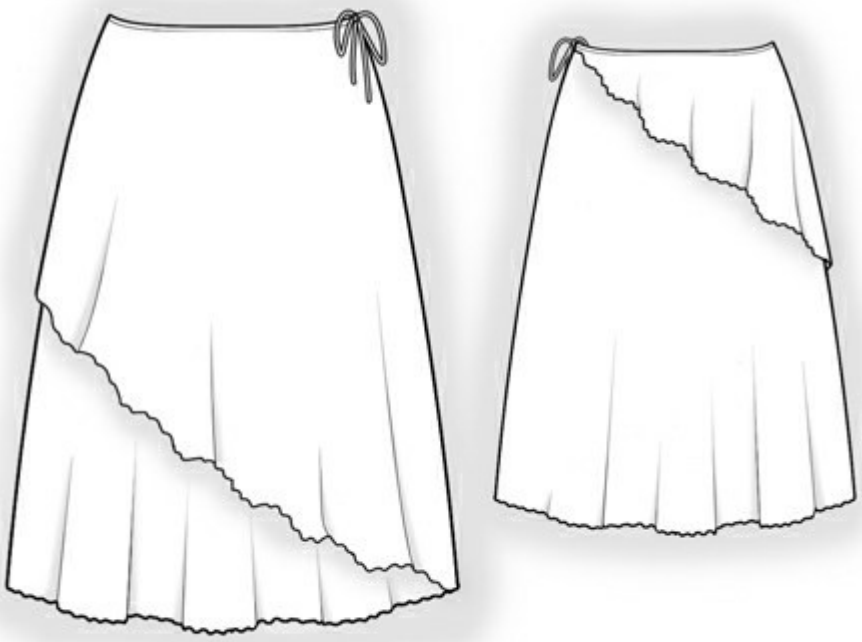
TECHNICAL DRAWING: