

Recommendations on fabric: natural or mixed mid-weight fabric suitable for skirts.

You will also need: fusible interfacing, zipper.

Seam allowances: hem of the garment – 3.0 cm, other seams – 1.0 cm.

Note on seam allowances:

- If the pattern has double contour the seam allowances are included. They are 1 cm unless specified otherwise.
- If the pattern has single contour, the seam allowances are NOT included and need to be added when laying out the pattern.

Note on length of fabric:

Attention! The amount of fabric needed for your pattern is not included. It will depend on the selected pattern size, the width, and design of the fabric you plan to use. First, print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm). Measure how much fabric you will need. Don't forget to account for pieces that need to be cut multiple times and pieces that are cut on the fold.




CUTTING:

Main fabric:

1. Upper back – cut 2 (B)
2. Side back – cut 2 (D)
3. Placket – cut 2 (C)
4. Lower back – cut 2 (E)
5. Front – cut 1 (G)
6. Back waistband/facing – cut 4 (A)
7. Front waistband/facing – cut 2 (F)
8. Flounce – cut 4 (H)

Fusible interfacing:

1. Back waistband facing – cut 2 (A)
2. Front waistband facing – cut 1 (F)

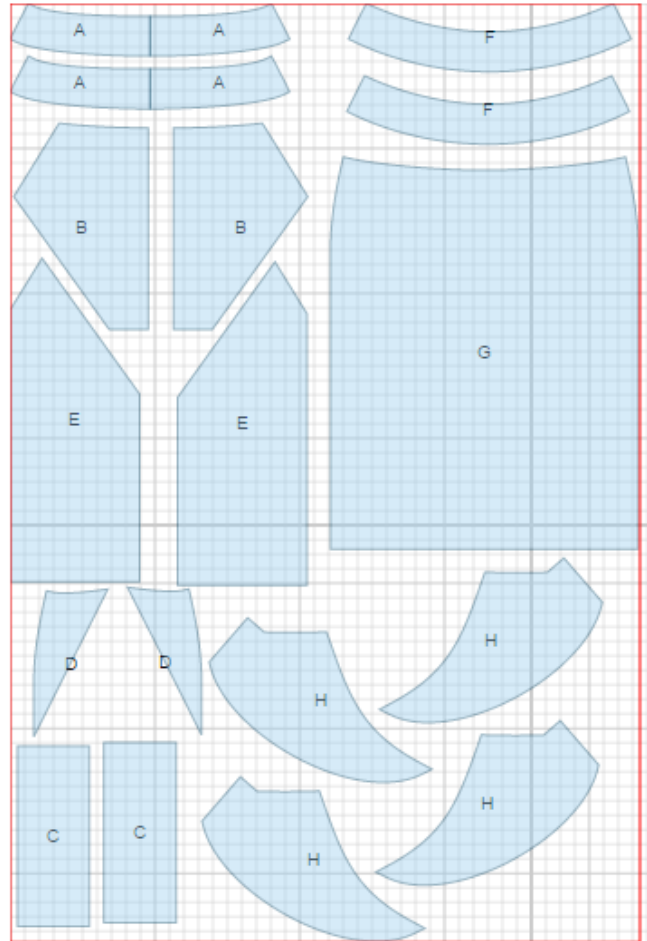

INSTRUCTIONS:

1. Apply fusible interfacing to waistband facings.
2. Fold flounces pairwise right sides together and sew outer edge. Slash seam allowances. Turn flounce right side out, straighten and press. Sew the edge with a decorative stitch at 0.1 cm.

-
3. Fold placket in half lengthwise right sides together and sew lower edge. Turn right side out, straighten, press. Pin founce onto the placket, aligning edges (sewn edge of the founce is directed towards placket fold), and sew. Make a founce according to technical drawing and fix on top edge to the placket. Please note that edge of the founce, made along the 'fold' line is directed inwards.
 4. Serge separately center edges of upper back. Sew center edge from zipper notch downwards. Press seam open.
 5. Fold and fix plackets to the founces line-on-line. Sew upper back to plackets. Serge and press seam allowances upwards.
 6. Sew lower back to upper back and to placket. Please note that lower part is 3 cm longer than the placket. Serge and press seam allowances toward side..
 7. Stitch side-back to back. Serge and press seam allowances toward side.
 8. Stitch outer back waistband to back, press seam allowances upwards. Sew in zipper. Stitch outer front waistband to front, press seam allowances upwards.
 9. Sew side seams of the skirt, serge and press seam toward back.
 10. Sew side seams of i waistband facings. Serge lower edge. Pin waistband facing right sides together with waistband and sew upper seam. Understitch and press toward inside. Turn edges of waistband facing under, and sew to zipper tape. Topstitch waistband facing into outer waistband connecting seam.
 11. Serge lower edge of the skirt, press onto wrong side and slipstitch with invisible stitches.

TECHNICAL DRAWING:

