

Sewing Pattern — Blouse 5695

Recommendations on fabric: hard stretchable jersey/fabric with elastic fibers


If the pattern has double contour the seam allowances are included.

Seam allowances are NOT included by default and need to be added when laying out and cutting details if your pattern has single contour.

Seam allowance: 1 cm for all seams

Attention! First of all please print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm) to see how much fabric you will need. Don't forget to count pair parts and symmetrical parts.

When sewing the garment, pay attention to notches, they must coincide.

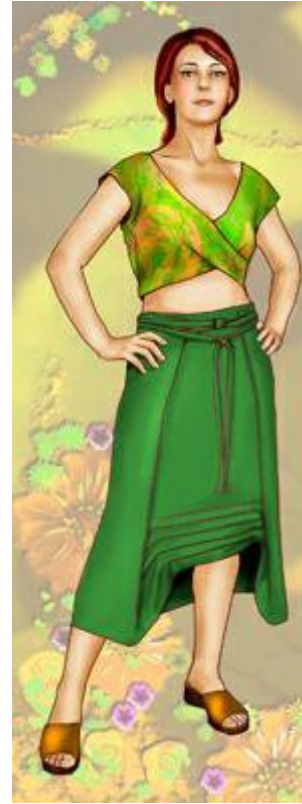

CUTTING:

Fabric:

1. Back part – 2 pieces
2. Right front part – 1 piece
3. Left front part – 1 piece

OUR ADVICE: stitch jersey details with special elastic/zig zag stitches. If you use an overlock, cut seam allowances till 0.6-0.8 cm width. Topstitch hem allowances with double needle to save elasticity.

INSTRUCTIONS:

1. Stitch back darts. Press darts toward center.
2. Stitch middle back edge. Press the seam leftward and neaten it. Neaten back lower edge.
3. Stitch left front dart. Press it toward detail's center.
4. Slash right lower allowance at dart's right side. Neaten the allowance, press it into wrong side and topstitch; stop stitching few centimeters before side seam.
5. Stitch right front dart. Cut dart depth to 1 cm and neaten it, continue neatening lower edge.

6. Stitch blouse shoulder edges. Press seams backward and neaten them.
7. Neaten front/back neckline allowance, press it into wrong side and topstitch.
8. Stitch left front part to right front part. Press the seam downward and neaten it.
9. Stitch side edges. Press seams backward and neaten them.
10. Neaten armhole allowances. Press the hem/armhole allowances into wrong side and topstitch.

TECHNICAL DRAWING:

