

Sewing Pattern — Top 5646

Recommendations on fabric: natural or mixed medium to high stretch knit fabric

If the pattern has a double line around it, the seam allowances are included.

Note: By default, seam allowances are NOT included (single line) and will need to be added when laying out and cutting details.

Seam allowance: on hem and lower edge of sleeve –1.5 cm, all other seams - 1 cm

Attention! First of all please print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm) to see how much fabric you will need. Don't forget to take into account pieces to be duplicated or cut on a fold.

Darts: The fold of the dart is always pressed toward the center of your garment, or down toward the hem.

When sewing the garment, pay attention to notches, they must match up with corresponding pieces.

CUTTING:


(On the pattern pieces, “beam” means straight of grain. Lay out your pieces accordingly. Some pieces will be cut on the fold. This is noted on the pattern piece. Mark all notches and other design features such as darts, pleats etc. from the pattern onto your fabric.)

Advice:

Knit fabric pieces are sewn together with special elastic or narrow zig-zag stitch. Seam allowance on hem is stitched with twin needles to save stretchiness. Pieces can also be sewn together with 3 or 4 – thread serger. When serging, cut seam allowances to 0.6 – 0.8 cm.

Fabric:

1. Back – cut 1
2. Front - cut 1
3. Sleeve – cut 2

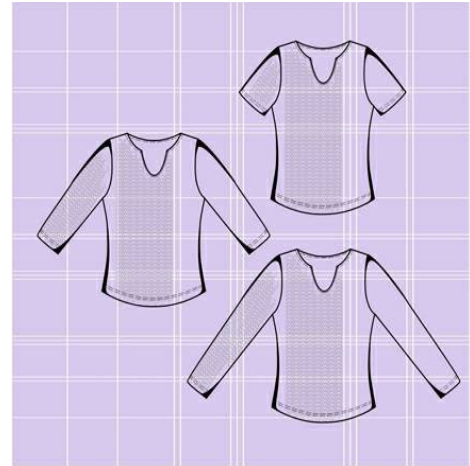

INSTRUCTIONS:

1. Sew or serge shoulder seams. Press toward back.
2. Serge neckline edge, turn under, press, and topstitch using a stretch-stitch.
3. Match marks, and sew sleeve to armhole, with a stretch-stitch or serging.
4. Sew the garment/sleeve side edges together in one continuous seam with stretch-stitch or serging.
5. Serge sleeve edge and bottom edge. Turn under, press, and topstitch with a stretch-stitch.

TECHNICAL DRAWING: