

## Little Sport Dress - Sewing Pattern #2108

Recommendations on fabric: natural/mixed knit fabric of medium stretchiness.

Seam allowances: seam allowance for hem of garment – 1.5 cm, other seams 1 cm.

### Note on seam allowances:


- If the pattern has double contour the seam allowances are included. They are 1 cm unless specified otherwise.
- If the pattern has single contour, the seam allowances are NOT included and need to be added when laying out the pattern.

### Note on length of fabric:

Attention! The amount of fabric needed for your pattern is not included. It will depend on the selected pattern size, the width, and design of the fabric you plan to use. First, print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm). Measure how much fabric you will need. Don't forget to account for pieces that need to be cut multiple times and pieces that are cut on the fold.

### Note on working with stretchy fabric:

Knitted fabric pieces are sewn together with special elastic or narrow zig-zag stitch. Seam allowance on hems can be stitched with twin needles to save stretchiness. Pieces can also be sewn together with a serger. When serging, cut seam allowances to 0.6 – 0.8 cm.

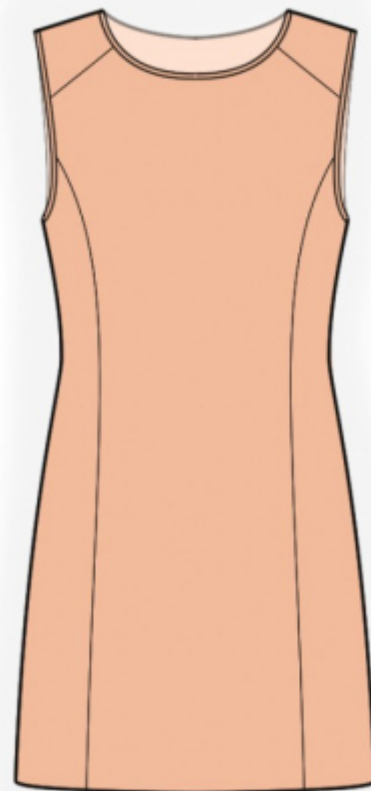

## CUTTING:

### Note on cutting:

On the pattern pieces, "beam" means straight of grain. Lay out your pieces accordingly. Some pieces will be cut on the fold. This is noted on the pattern piece. Mark all notches and other design features such as pleats etc. from the pattern onto your fabric.

When sewing the garment, pay attention to notches, they must match up.

Main fabric:

1. Back – cut 1 on fold
2. Center front – cut 1 on fold
3. Side front – cut 2

4. Yoke – cut 2

**INSTRUCTIONS:**

1. Sew side front to center front, press seams towards center and serge.
2. Sew yoke to front, press seam allowances towards yoke and serge. Sew yoke to back on the right side, press seam allowances towards yoke and serge.
3. Cut (or take ready) bias tape, its width should equal 4 cm, length should equal the length of neckline + 4 cm. Fold bias tape in half lengthwise wrong sides together and press. Pin bias tape onto wrong side of neckline and sew. Fold away onto right side and topstitch.
4. Sew left side of yoke to back, press seam allowances towards yoke and serge. Sew a fixing stitch on the neckline at the seam of yoke.
5. Cut (or take ready) bias tape, its width should equal 4 cm, length should equal the length of armhole + 4 cm. Fold bias tape in half lengthwise wrong sides together and press. Pin bias tape on the wrong side of armhole and sew. Fold away onto right side and topstitch.
6. Sew side seams, press towards the back and serge. Sew a fixing stitch on the armhole near side seam.
7. Serge the lower edge of garment, press onto wrong side and topstitch.

**TECHNICAL DRAWING:**

