Top With Hood - Выкройка #2356

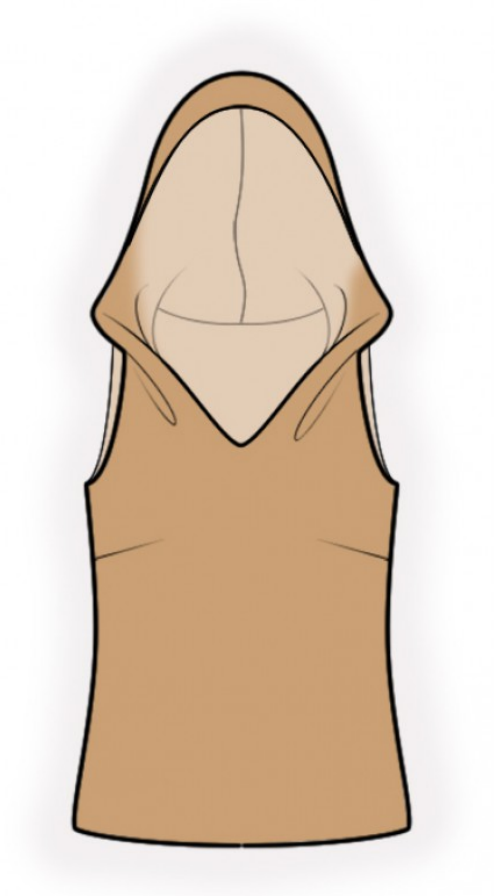

Recommendations on fabric: natural/mixed fabrics suitable for blouses.

Seam allowances: all seams 1 cm. Seam allowances for hem of main fabric and hem of lining – 2 cm.

О припусках на швы::
- Если на выкройке двойной контур, припуски на швы уже включены. Они составляют 1 см, если не указано иначе.
- Если у выкройки одинарный контур, припуски на швы не включены, и должны быть добавлены при раскрое.

О требуемой длине ткани:
Внимание! В инструкциях не указано необходимое количество ткани, так как оно зависит от ширины и рисунка ткани, а также Ваших размерных признаков. Прежде всего, распечатайте лекала и разложите их на ширине, соответствующей ширине ткани, которую Вы хотите использовать (обычно от 90 до 150 см), чтобы определить, сколько ткани Вам потребуется. Не забывайте учитывать парные детали и детали со сгибом.

РАСКРОЙ:

Обратите внимание при раскрое:
Обратите внимание на обозначение долевой нити при раскладке деталей. Некоторые детали кроятся со сгибом. Это указано на лекале. Перенесите все отметки и другие особенности дизайна (вытачки и т.п.) с лекала на ткань.
При стачивании деталей, обращайте внимание на надсечки, они должны совпадать.

1. Back – cut 1 on fold
2. Front - cut 1 on fold
3. Back lining – cut 1 on fold
4. Front lining – cut 1 on fold

Инструкции:

1. Sew darts on front. Press bulk towards top.

2. Sew center edge of hood from main fabric. Press the seam allowances apart.

3. Clip into seam allowance on front in the corner. Sew hood into back neckline. Press the seam allowances apart.

4. Sew shoulder and side seams. Press the seam apart.

5. Sew together pieces of lining in the same way as you have sewn pieces from main fabric. Pin lining to the garment right sides together and sew front neckline opening and edge of hood. Turn the piece right side out and press.

6. Sew armhole in two steps - first sew the front armhole, then sew the back armhole. Clip seam allowances and press.

7. Slipstitch seam allowances on main fabric and lining along the seam allowances on back neckline.

8. Serge hem seam allowances, press onto wrong side and topstitch.

Технический рисунок:

