

## Knit Dress With Raglan Sleeves - Sewing Pattern #4807

Recommendations on fabric: natural/mixed knit fabric of small stretchiness.


Seam allowances: seam allowance for hem of garment and hem of sleeve – 1.5 cm, other seams 1 cm.

### Note on seam allowances:

- If the pattern has double contour the seam allowances are included. They are 1 cm unless specified otherwise.
- If the pattern has single contour, the seam allowances are NOT included and need to be added when laying out the pattern.

### Note on length of fabric:

Attention! The amount of fabric needed for your pattern is not included. It will depend on the selected pattern size, the width, and design of the fabric you plan to use. First, print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm). Measure how much fabric you will need. Don't forget to account for pieces that need to be cut multiple times and pieces that are cut on the fold.

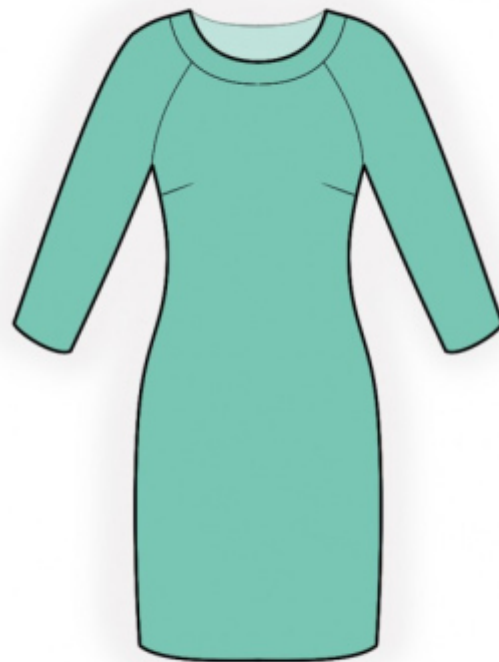

## CUTTING:

### Note on cutting:

On the pattern pieces, "beam" means straight of grain. Lay out your pieces accordingly. Some pieces will be cut on the fold. This is noted on the pattern piece. Mark all notches and other design features such as pleats etc. from the pattern onto your fabric.

When sewing the garment, pay attention to notches, they must match up.

Main fabric:

1. Back – cut 1
2. Front – cut 1
3. Sleeve – cut 2
4. Placket – cut 1

## INSTRUCTIONS:

1. Sew darts on front, press bulk towards top.
2. Sew sleeve to front. Serge the seam and press.
3. Sew sleeve to back. Serge the seam and press.
4. Sew sleeve seam and side seam with one continuous seam. Serge and press.
5. Serge the lower edge of garment, the lower edge of sleeve. Fold onto wrong side, press and topstitch.
6. Sew placket into ring. Placket turn right side out and press. Fold placket in half, wrong sides together. Sew placket to neckline, stretching the placket a little and matching notches. The placket seam is placed at the top of left sleeve. Serge and press the placket seam.

## TECHNICAL DRAWING:

