
Dress With Belt - Sewing Pattern #4824

Recommendations on fabric: natural/mixed knit fabric of medium stretchiness.

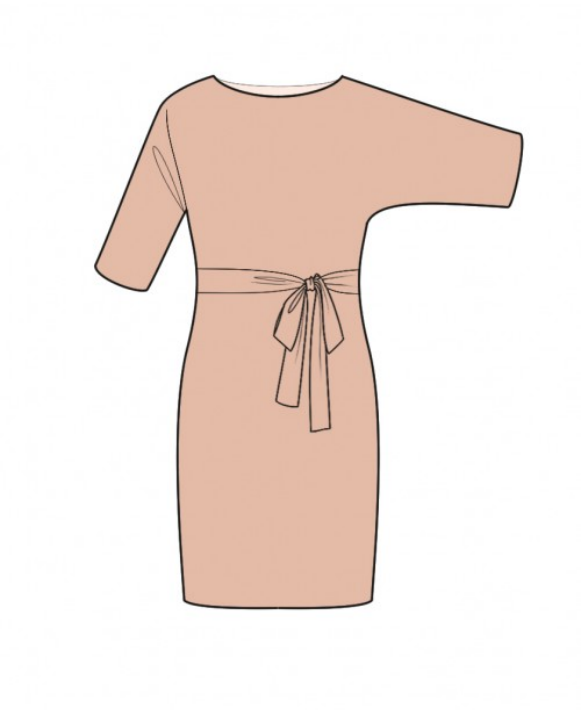

Seam allowances: all seams 1 cm. Seam allowance along neckline 1.5 cm, seam allowance for hem of garment and hem of sleeve – 2 cm.

Note on seam allowances:
- If the pattern has double contour the seam allowances are included. They are 1 cm unless specified otherwise.
- If the pattern has single contour, the seam allowances are NOT included and need to be added when laying out the pattern.

Note on length of fabric:
Attention! The amount of fabric needed for your pattern is not included. It will depend on the selected pattern size, the width, and design of the fabric you plan to use. First, print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm). Measure how much fabric you will need. Don't forget to account for pieces that need to be cut multiple times and pieces that are cut on the fold.

Note on working with stretchy fabric:
Knitted fabric pieces are sewn together with special elastic or narrow zig-zag stitch. Seam allowance on hems can be stitched with twin needles to save stretchiness. Pieces can also be sewn together with a serger. When serging, cut seam allowances to 0.6 – 0.8 cm.

CUTTING:

Note on cutting:
On the pattern pieces, “beam” means straight of grain. Lay out your pieces accordingly. Some pieces will be cut on the fold. This is noted on the pattern piece. Mark all notches and other design features such as pleats etc. from the pattern onto your fabric.
When sewing the garment, pay attention to notches, they must match up.

Tissu principal:
1. Dos supérieur – 1 pièce
2. Devant supérieur – 1 pièce
3. Dos inférieur – 1 pièce
4. Devant inférieur – 1 pièce

5. Ceinture – 1 pièce

INSTRUCTIONS:

1. . Surjeter les marges de couture et repasser en haut.

2. Coudre coutures des épaules. Surjeter les coutures et repasser vers l'arrière.

3. Coudre les coutures latérales coudre les bords des manches en même temps, repassez les coutures vers l'arrière et surjeter.

4. , pliez à l'intérieur sur l'envers et surpiquer.

5. , repasser sur l'envers et surpiquer.

6. Ceinture épingler ensemble en deux dans le sens de la longueur endroit contre endroit et coudre sur tous les bords, laissant une ouverture pour tourner à droite. Couper les coins, ceinture retournez le vêtement à l'endroit, repasser, coudre l'ouverture pour la fermer.

Conseil: .

TECHNICAL DRAWING:

